

Flotide Pool Filter set
PE/fibreglass-reinforced
polyester 50 mm / 1 1/2"
metric/imperial glue socket
2,5bar 230VAC grey type
FSF400-6W with RCD plug
(0897595)



FLOTIDE



bosta
bringing water to life



TECHNICAL SPECIFICATIONS

| | |
|----------------|------------------------------------|
| Colour | grey |
| Material | PE/fibreglass-reinforced polyester |
| Connection | metric/imperial glue socket |
| Voltage | 230VAC |
| Frequency | 50 Hz |
| Pressure | 2,5 bar |
| Max. temp. | 43 °C |
| Type | FSF400-6W |
| Size | 50 mm / 1 1/2" |
| Diameter | 410 mm |
| Weight | 23 kg |
| Sand | 35 kg |
| Max flow rate | 6 m ³ /h |
| Pump | SS050 |
| Max. pool vol. | 30 m ³ |

DIMENSIONS

A 760 mm

B 759 mm

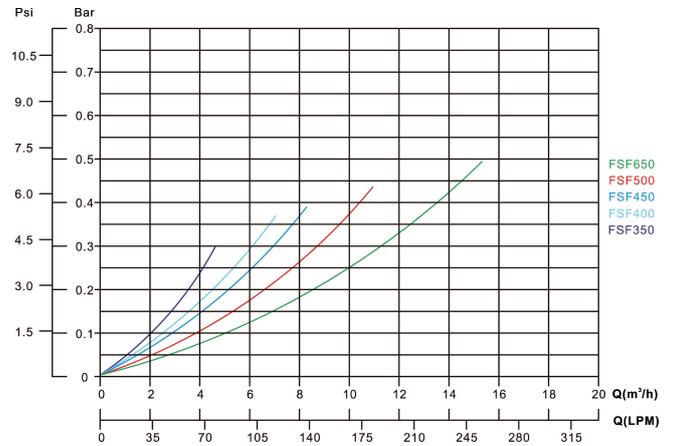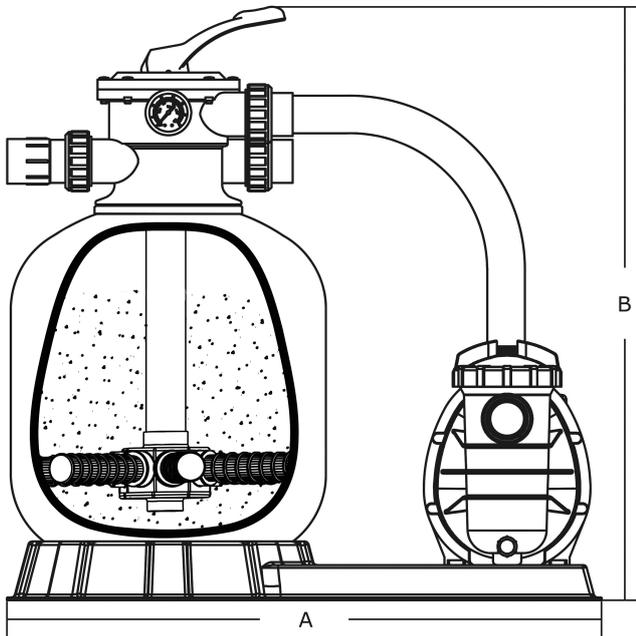

PRODUCT INFORMATION

PE/fibreglass-reinforced polyester double layered tank with unequalled strength and durability. Equipped with top mount 6-way valve and centrifugal pump with pre-filter. Switch off the pump before each lever action.

Features:

- Designed for domestic pools
- Simple operation with 6-way multi-port valve
- Equipped with RCD differential plug (30mA)

Last modified date: 22/02/2026

Bosta UK Ltd.
Reflection House

Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>