

DAB Submersible pump fibre-reinforced plastic 1" female thread 1,9A 230VAC green type Feka 300 M-A with float switch (7038435)



TECHNICAL SPECIFICATIONS

| | |
|--------|-------|
| Colour | green |
|--------|-------|

| | |
|----------|--------------------------|
| Material | fibre-reinforced plastic |
|----------|--------------------------|

| | |
|-----------|---------|
| Pump body | plastic |
|-----------|---------|

| | |
|---------------------|--------------------------|
| Material impeller 1 | fibre-reinforced plastic |
|---------------------|--------------------------|

| | |
|------------|---------------|
| Connection | female thread |
|------------|---------------|

| | |
|---------|--------|
| Voltage | 230VAC |
|---------|--------|

| | |
|------------------|--------|
| Max. temperature | 35° °C |
|------------------|--------|

Minimum medium temperature 0 °C
(continuous)

| | |
|-------|-----|
| Press | 1 " |
|-------|-----|

| | |
|------|--------------|
| Type | Feka 300 M-A |
|------|--------------|

| | |
|--------------|--------|
| Output Power | 0,3 HP |
|--------------|--------|

| | |
|------|----|
| Size | 1" |
|------|----|

| | |
|-------|----------|
| Float | included |
|-------|----------|

| | |
|-------|---------|
| Power | 0.22 kW |
|-------|---------|

| | |
|-----|-----|
| MWC | 6,4 |
|-----|-----|

| | |
|--------|-------|
| Ampere | 1,9 A |
|--------|-------|

Max flow rate

12 m³/h

DIMENSIONS

ØDi-1

1 1/4 "

H-1



71 mm

H-2

329 mm

Db

180 mm

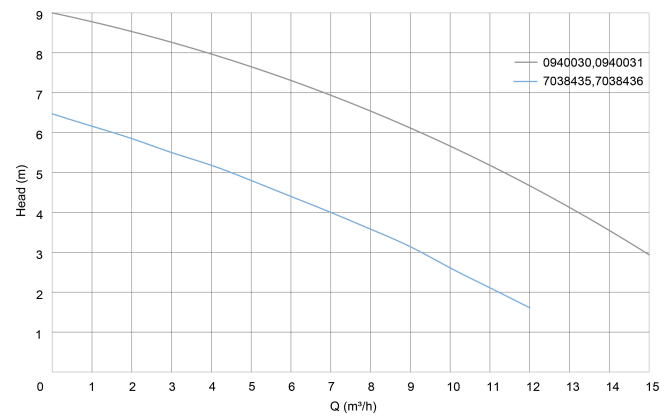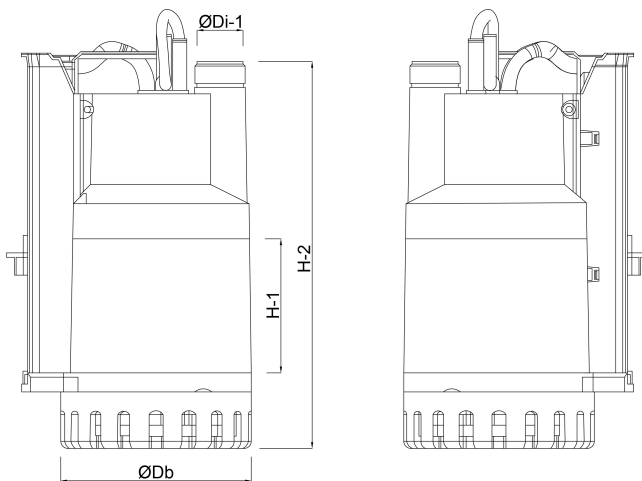

PRODUCT INFORMATION

For solids up to 25mm.

Technical features:

Pump body, protection cover, filter and fan in noryl fibreglass.

Motor axis and motor body in S/S steel.

Seal with 3 seal rings in oil chamber.

Automatic float switch.

With built in thermal safety.

With approximately 10 metres cable.

Last modified date: 15/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>