

**Foras Multi-stage centrifugal
pump stainless steel 304 1"
female thread 7bar 2,5A
230/400VAC blue type P 3S-
120/6 T (0920603)**



TECHNICAL SPECIFICATIONS

Colour	blue
Material	stainless steel 304
Pump body	stainless steel 304
Material impeller 1	stainless steel 304
Material seal	ceramic/graphite
Connection	female thread
Max. temperature	110 °C
Minimum medium temperature (continuous)	-15 °C
Max flow rate	4.8 m ³ /h
Press	1 "
Suction	1 "
BEP Capacity	3.2
Efficiency	39 %
Type	P 3S-120/6 T
Output Power	1,2 HP
Size	1"

Seal	type L
Voltage	230/400VAC
Weight	12.5 kg
Power	0.9 kW
Impellers	6
MWC	66,6
Ampere	2,5 A
BEP Head	36



DIMENSIONS

W-1	164 mm
ØDi-1	1 "
ØDi-2	1 "
G-1	140 mm
L	428 mm
H-1	203 mm
Lb	190,8 mm
Cb-1	128 mm
Lb-2	104,7 mm

Cl-1 175 mm

W-2 178 mm

H-2 192 mm

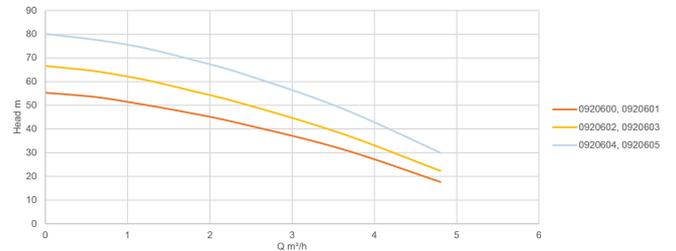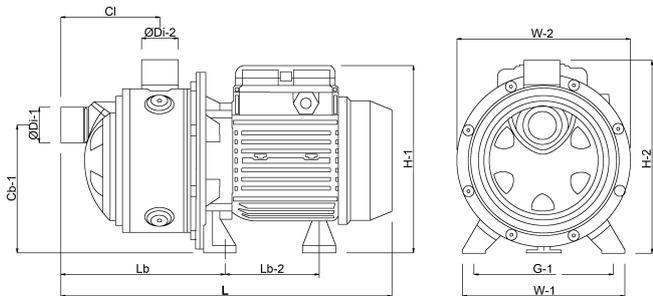

PRODUCT INFORMATION

Stainless steel multistage horizontal pumps. Pumping of clean non-loaded fluids in the domestic, agricultural and industrial sectors; pressurising systems; irrigation; drinking and glycol water; water treatment; food industry; heating and air conditioning; washing system.

Maximum liquid temperature: from -15 up to 110 °C

Ambient temperature: max 40 °C.

Insulation class F; protection IP 44.

Supplied without cable.

Last modified date: 15/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>