

**Profec Swing check valve with  
lifting device ductile iron  
(GGG40) epoxy coating DN200  
DIN flange 16bar DN200 blue  
PN10 (0402640)**



# TECHNICAL SPECIFICATIONS


Colour	blue
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Material cover	ductile iron
Material housing	ductile iron (GGG40)
Material seal	NBR
Connection	DIN flange
Gasket	NBR
Temperature range	0°C - 80°C
Pressure	16 bar
Capacity	685 m <sup>3</sup> /h
Size	DN200
Length	500 mm
DN	200
Flange	PN10
Outer ø	340 mm
PCD	295 mm

# DIMENSIONS

Ct-1 170 mm

L 500 mm

PCD 295 mm

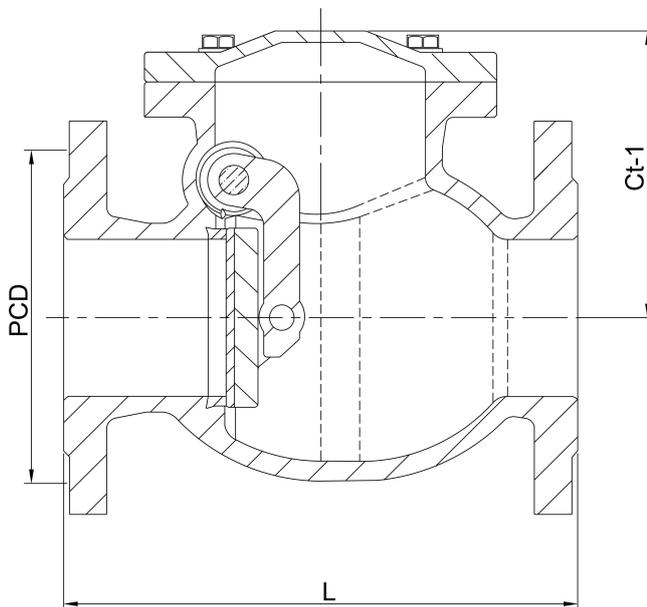

**Last modified date: 21/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)

<http://www.bosta.com>