


# Itap Ball valve brass nickel plated 1 1/4" female thread x male thread 5bar DN32 DVGW type 067 (0401165)

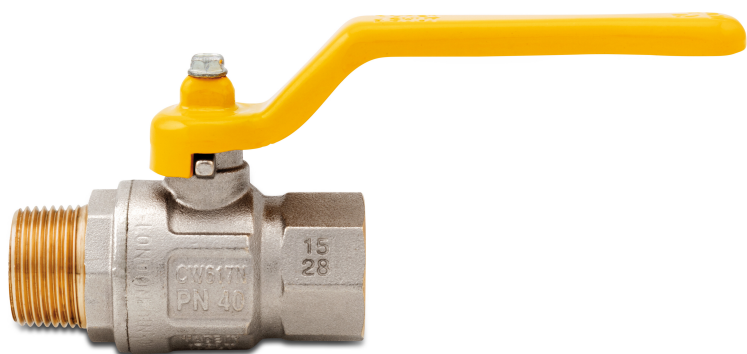

# TECHNICAL SPECIFICATIONS

|      |     |
|------|-----|
| Type | 067 |
|------|-----|

|          |       |
|----------|-------|
| Material | brass |
|----------|-------|

|                   |               |
|-------------------|---------------|
| Surface treatment | nickel plated |
|-------------------|---------------|

|          |      |
|----------|------|
| Approval | DVGW |
|----------|------|

|           |       |
|-----------|-------|
| Operation | lever |
|-----------|-------|

|              |        |
|--------------|--------|
| Colour lever | yellow |
|--------------|--------|

|                 |       |
|-----------------|-------|
| Handle material | steel |
|-----------------|-------|

|                      |        |
|----------------------|--------|
| Housing construction | 2-part |
|----------------------|--------|

|               |                          |
|---------------|--------------------------|
| Ball material | hard chrome plated brass |
|---------------|--------------------------|

|                  |       |
|------------------|-------|
| Material housing | brass |
|------------------|-------|

|               |      |
|---------------|------|
| Material seal | PTFE |
|---------------|------|

|            |                             |
|------------|-----------------------------|
| Connection | female thread x male thread |
|------------|-----------------------------|

|                  |       |
|------------------|-------|
| Max. temperature | 60 °C |
|------------------|-------|

Minimum medium temperature -10 °C  
(continuous)

|      |      |
|------|------|
| Flow | full |
|------|------|

|          |       |
|----------|-------|
| Pressure | 5 bar |
|----------|-------|

|      |        |
|------|--------|
| Size | 1 1/4" |
|------|--------|

|    |    |
|----|----|
| DN | 32 |
|----|----|

## DIMENSIONS

|    |        |
|----|--------|
| Lb | 105 mm |
|----|--------|

|       |         |
|-------|---------|
| ØDi-1 | 1 1/4 " |
|-------|---------|

|       |         |
|-------|---------|
| ØDo-2 | 1 1/4 " |
|-------|---------|


|     |         |
|-----|---------|
| F-1 | 21.4 mm |
|-----|---------|

|     |         |
|-----|---------|
| F-2 | 21.5 mm |
|-----|---------|

|      |       |
|------|-------|
| Ct-1 | 75 mm |
|------|-------|

|   |        |
|---|--------|
| R | 138 mm |
|---|--------|

|     |       |
|-----|-------|
| ØDf | 32 mm |
|-----|-------|

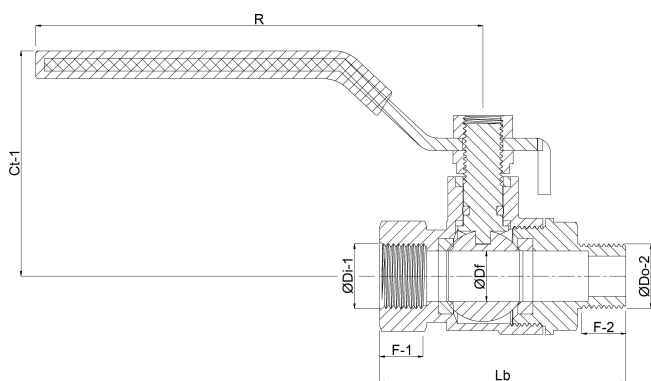

**Last modified date: 14/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>