

**Profec Gate valve cast iron  
GGG 50 epoxy coating DN250  
DIN flange 16bar blue PN10  
type 302 (7038249)**



# TECHNICAL SPECIFICATIONS

|                         |                       |
|-------------------------|-----------------------|
| Colour                  | blue                  |
| Type                    | 302                   |
| Material                | cast iron GGG 50      |
| Surface treatment       | epoxy coating         |
| Operation               | handwheel             |
| Colour lever            | blue                  |
| Handle material         | cast iron             |
| Material valve          | cast iron EPDM coated |
| Material spindle        | stainless steel       |
| Material housing        | cast iron GGG 50      |
| Material seal           | NBR                   |
| Connection              | DIN flange            |
| Max. temperature        | 110 °C                |
| RAL number              | RAL5017               |
| Flange according to DIN | DIN 2501/PN10         |
| Pressure                | 16 bar                |
| Max. temp.              | 120 °C                |

Size DN250

Length 250 mm

Flange PN10

Outer ø 403 mm

PCD 350/355 mm

Holes 12

## DIMENSIONS

Construction length din 3352/2c/f4


L 250 mm

L 250 mm

PCD 350/355 mm

Ct-1 555 mm

R 330 mm

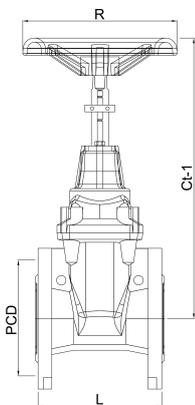

**Last modified date: 19/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>