


**Profec Ball valve ductile cast
iron GGG40 varnished DN125
DIN flange 16bar blue PN10/16
(0401605)**

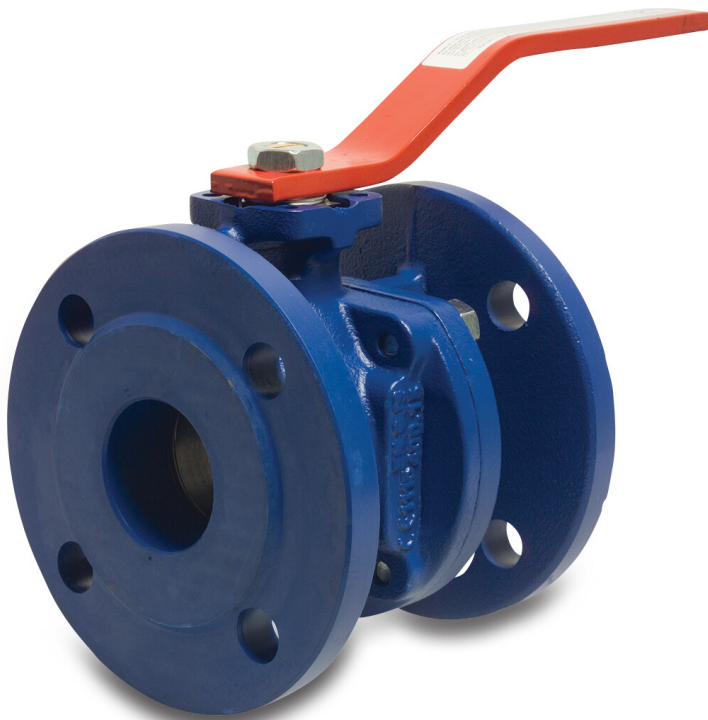

TECHNICAL SPECIFICATIONS

Colour	blue
Material	ductile cast iron GGG40
Surface treatment	varnished
Operation	lever
Colour lever	red
Handle material	steel
Housing construction	2-part
Material housing	cast iron GG 25
Material seal	PTFE
Connection	DIN flange
Temperature range	-10°C - 100°C
Pressure	16 bar
Size	DN125
Flange	PN10/16
PCD	210 mm
Bolt hole	18 mm
Holes	8

DIMENSIONS


Handle height	185
---------------	-----

L	200 mm
---	--------

PCD	210 mm
-----	--------

Ct-1	225 mm
------	--------

R	450 mm
---	--------

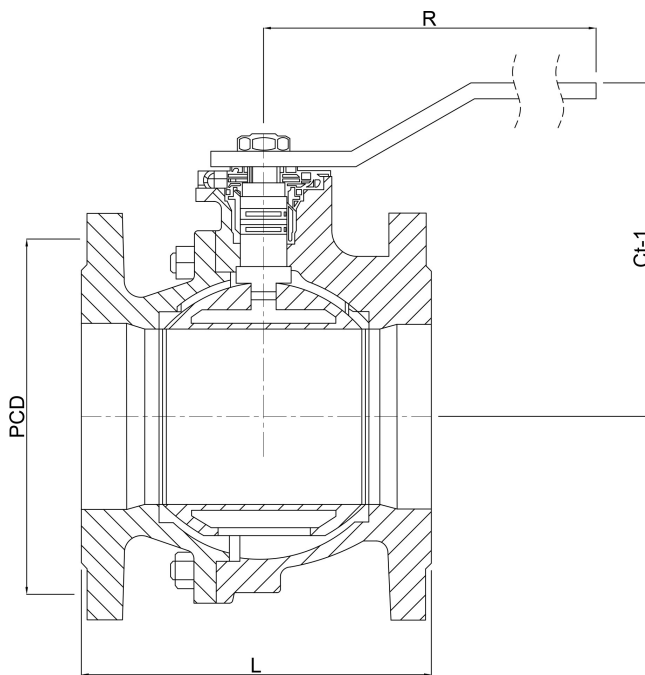

Last modified date: 10/10/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds

Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>