

**DAB Submersible borehole
pump stainless steel 304 1"
female thread 3,3A 230VAC
with 1m cable type Micra 50M
oil cooling (7030954)**



TECHNICAL SPECIFICATIONS

Material stainless steel 304

Pump body stainless steel 304

Material impeller 1 noryl GFN2

Connection female thread

Type oil cooling

Max. temperature 35 °C

Outer ø 74 mm

Minimum medium temperature 0 °C
(continuous)

Max flow rate 2.7 m³/h

Press 1 "

Maximum ambient temperature -5 °C

BEP Capacity 1.8

Minimum ambient temperature 40 °C

IP value IP68, class F



Type Micra 50M

Output Power 0,5 HP

Model	with 1m cable
Size	1"
Voltage	230VAC
Weight	9 kg
Power	0.37 kW
Impellers	15
MWC	45
Ampere	3,3 A
BEP Head	26.9
PORlh	34.3
PORhh	18.8
PORlq	1.3
PORhq	2.2

DIMENSIONS

Db	74 mm
L	930 mm
L	930 mm
ØDi-1	1 "

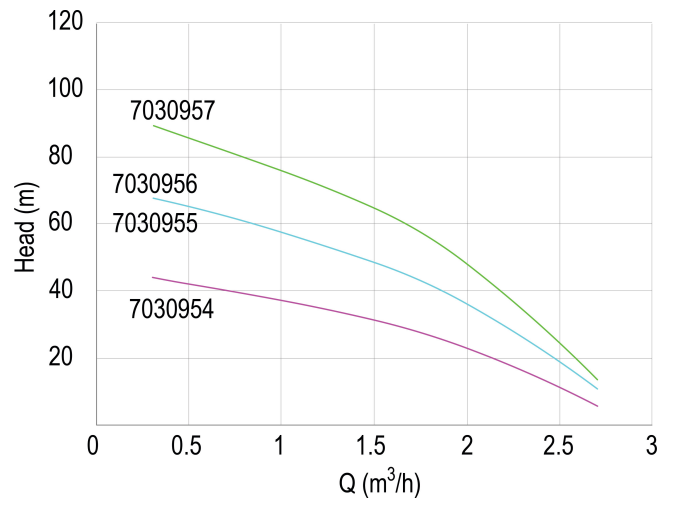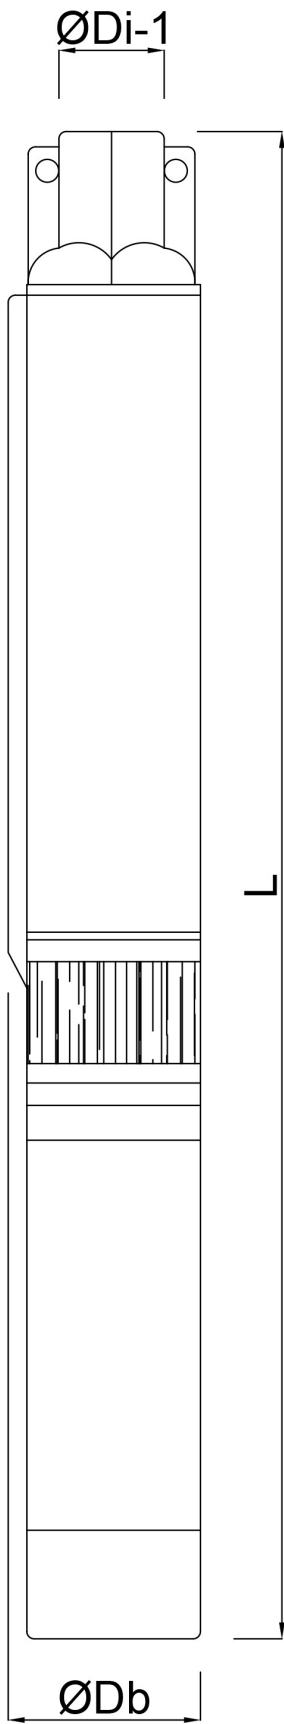

PRODUCT INFORMATION

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, and chemically neutral, with properties similar to water.

Maximum permitted amount of sand: 40 g/m³.

Installation: in 3" wells or larger, tanks and cisterns, vertical position. In case of horizontal installation, ensure a minimum load on the thrust assembly.

Last modified date: 24/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>