

**Profec Swing check valve with  
lifting device ductile iron  
(GGG40) epoxy coating DN65  
DIN flange 16bar DN65 blue  
PN10/16 (0402635)**



# TECHNICAL SPECIFICATIONS


|                   |                      |
|-------------------|----------------------|
| Colour            | blue                 |
| Material          | ductile iron (GGG40) |
| Surface treatment | epoxy coating        |
| Material cover    | ductile iron         |
| Material housing  | ductile iron (GGG40) |
| Material seal     | NBR                  |
| Connection        | DIN flange           |
| Gasket            | NBR                  |
| Temperature range | 0°C - 80°C           |
| Pressure          | 16 bar               |
| Capacity          | 65 m <sup>3</sup> /h |
| Size              | DN65                 |
| Length            | 240 mm               |
| DN                | 65                   |
| Flange            | PN10/16              |
| Outer ø           | 185 mm               |
| PCD               | 145 mm               |

## DIMENSIONS

L 240 mm

PCD 145 mm

Ct-1 92.5 mm

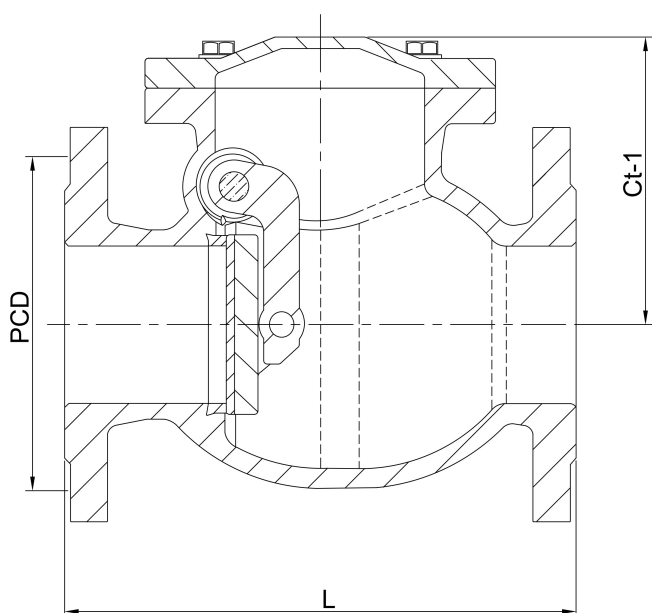

**Last modified date: 06/11/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)

