

**Submersible borehole pump 1
1/2" female thread 7,5A
230VAC with 20m cable type
SDM 3/15 with capacitor - oil
cooling (7031115)**



TECHNICAL SPECIFICATIONS

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	noryl
---------------------	-------

Model	with 20m cable
-------	----------------

Connection	female thread
------------	---------------

Type	with capacitor - oil cooling
------	------------------------------

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Outer ø	90 mm
---------	-------

Max flow rate	6 m ³ /h
---------------	---------------------

Press	1,5 "
-------	-------

Maximum ambient temperature	35 °C
-----------------------------	-------

BEP Capacity	4.8
--------------	-----

IP value	IP68
----------	------

Type	SDM 3/15
------	----------

Output Power	1,5 HP
--------------	--------

MWC	90 m
-----	------

Size	1 1/2"
------	--------

Weight 17 kg

Power 1.1 kW

Impellers 15

Height 1260 mm

Ampere 7,5 A

BEP Head 44

PORlh 69

PORhh 17

PORlq 3.36



PORhq 5.76

DIMENSIONS

Db 90 mm

H-1 1260 mm

ØDi-1 1 1/2 "

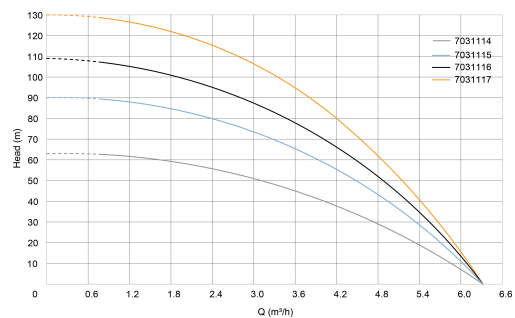

bosta
bringing water to life

PRODUCT INFORMATION

Submersible borehole pump kit with built-in capacitor.

Increased resistance to sand.

Maximum amount of sand: 300 g/m³.

Installation: Fixed in vertical position.

20 mtr cable, DIN plug without control box

Last modified date: 08/05/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>