

Ball valve PVC-U 25 mm glue socket 16bar DN20 grey type AK (0161501)



TECHNICAL SPECIFICATIONS

Colour	grey
--------	------

Type	AK
------	----

Material	PVC-U
----------	-------

Operation	lever
-----------	-------

Colour lever	red
--------------	-----

Handle material	PVC-U
-----------------	-------

Housing construction	3-part
----------------------	--------

Material housing	PVC-U
------------------	-------

Material seal	PE/EPDM
---------------	---------

Connection	glue socket
------------	-------------

Max. temperature	60 °C
------------------	-------

Minimum medium temperature 0 °C
(continuous)

Size	25 mm
------	-------

DN	20
----	----

Pressure	16 bar
----------	--------

DIMENSIONS

Ct-1	65 mm
------	-------


Lb	111 mm
----	--------

R	35 mm
---	-------

ØDf	20 mm
-----	-------

ØDi-1	25 mm
-------	-------

ØDi-2	25 mm
-------	-------

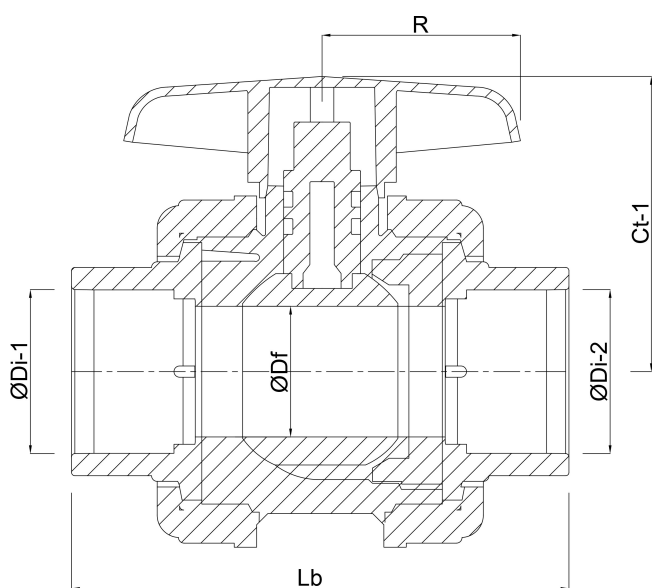

Last modified date: 20/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds

Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>