

DAB Deep well pump stainless steel 304 1" female thread 2,4A 230VAC with 1.4m cable type Micra 100M oil cooling **(7030957)**



TECHNICAL SPECIFICATIONS

Material	stainless steel 304
----------	---------------------

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	noryl GFN2
---------------------	------------

Connection	female thread
------------	---------------

Type	oil cooling
------	-------------

Max. temperature	35 °C
------------------	-------

Outer ø	74 mm
---------	-------

Minimum medium temperature 0 °C
(continuous)

Max flow rate	2.7 m ³ /h
---------------	-----------------------

Press	1 "
-------	-----

Maximum ambient temperature -5 °C

BEP Capacity	1.8
--------------	-----

Minimum ambient temperature 40 °C

IP value	IP68, class F
----------	---------------

Type	Micra 100M
------	------------

Output Power	1 HP
--------------	------

Model	with 1.4m cable
-------	-----------------

Size	1"
------	----

Voltage	230VAC
---------	--------

Weight	13.6 kg
--------	---------

Power	0.75 kW
-------	---------

Impellers	30
-----------	----

MWC	90
-----	----

Ampere	2,4 A
--------	-------

BEP Head	56
----------	----

PORlh	70.1
-------	------

PORhh	39.6
-------	------

PORlq	1.3
-------	-----

PORhq	2.2
-------	-----



DIMENSIONS

ØDi-1	1 "
-------	-----

L	1390 mm
---	---------

L	1390 mm
---	---------

Db	74 mm
----	-------

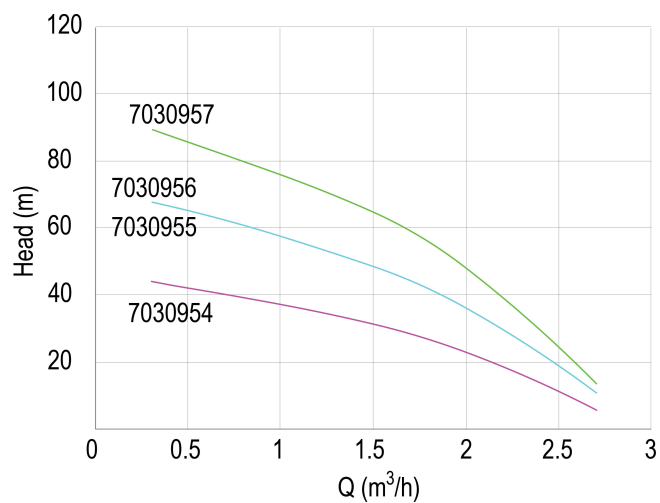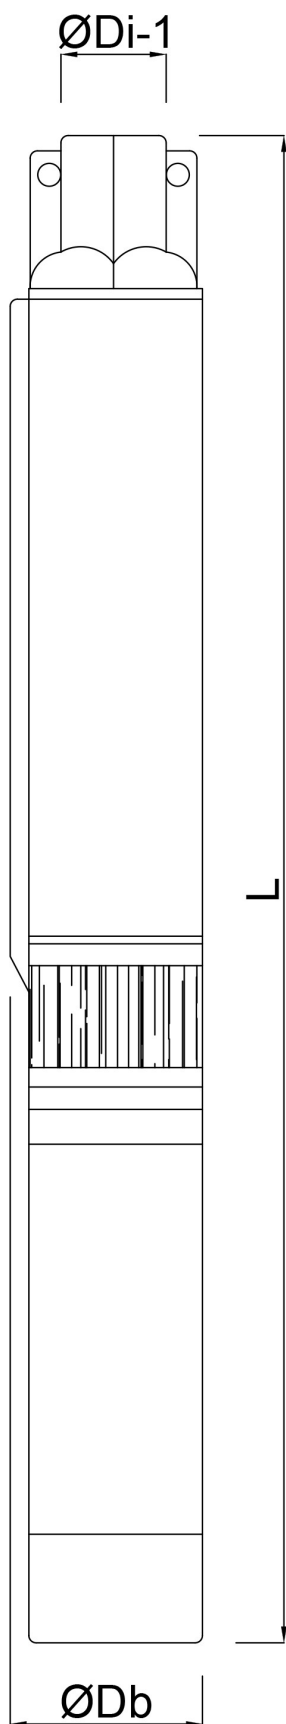

bosta
bringing water to life

PRODUCT INFORMATION

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, and chemically neutral, with properties similar to water.

Maximum permitted amount of sand: 40 g/m³.

Installation: in 3" wells or larger, tanks and cisterns, vertical position. In case of horizontal installation, ensure a minimum load on the thrust assembly.

Last modified date: 08/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>