

**Grundfos Multi-stage
centrifugal pump stainless
steel 1 1/4" 2,5A 400VAC type
CRI 1-19 A CA I V HQQV
(7039665)**



GRUNDFOS 

TECHNICAL SPECIFICATIONS

Material stainless steel

Shaft stainless steel 316

Pump body stainless steel 316

Material impeller 1 stainless steel 304

Voltage 400VAC

Temperature range -20°C - 90°C

Maximum ambient temperature 40 °C

Minimum ambient temperature 0 °C

Type CRI 1-19 A CA I V HQQV

Output Power 1.5 HP

Size 1 1/4"

Power 1.1 kW

Impellers 19

MWC 114

Ampere 2,5 A

Max flow rate 2.4 m³/h

Suction 1 1/4 "

Efficiency 82,7 %

Motor RPM 2770

DIMENSIONS

L 162 mm

H-1 802 mm



W-1 210 mm

ØDi-1 35 mm

ØDi-2 35 mm

Cb-1 50 mm

Cb-2 50 mm

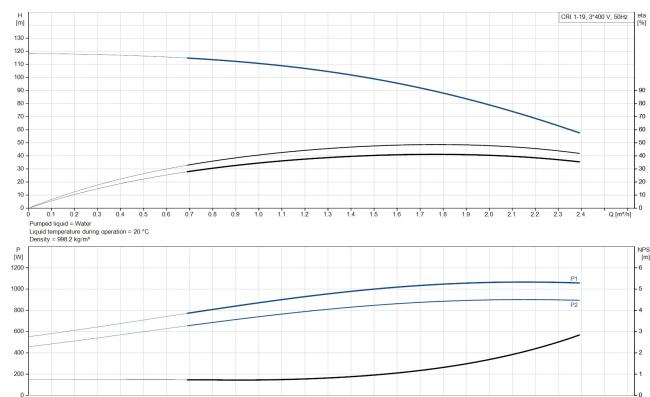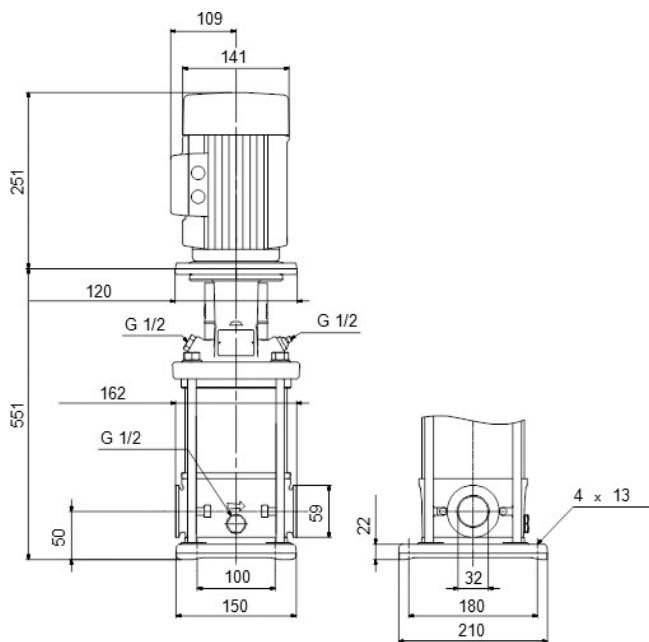

PRODUCT INFORMATION

Grundfos CRI pumps are vertical, non-self-priming, multistage, in-line, centrifugal pumps for installation in pipe systems and mounting on a foundation, suitable for industrial applications. This design provides a more compact pump design and pipework. CR pumps are designed for a variety of applications ranging from the pumping of potable water to the pumping of chemicals. The pumps are therefore suitable for a wide range of pumping systems where the performance and material of the pump meet specific demands.

Last modified date: 10/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>