

**Foras Jet pump cast iron 1 1/2"
x 1 1/4" female thread 8bar
4,8A 230/400VAC blue self
priming type JAM 300 T
(7034807)**



TECHNICAL SPECIFICATIONS

Colour	blue
Material	cast iron
Pump body	cast iron
Material impeller 1	noryl
Model	self priming
Connection	female thread
Seal	type B
Max. temperature	50 °C
Max flow rate	72 m ³ /h
Press	1 1/4 "
Suction	1 1/2 "
Type	JAM 300 T
Size	1 1/2" x 1 1/4"
Voltage	230/400VAC
Minimum medium temperature 0 °C (continuous)	
Power	2.5 kW

MWC	64,8
-----	------

Ampere	4,8 A
--------	-------

Maximum ambient temperature 40 °C

BEP Capacity	6
--------------	---

BEP Head	43
----------	----

PORlh	59
-------	----

PORhh	65
-------	----

PORlq	4.2
-------	-----

PORhq	7.2
-------	-----

Minimum ambient temperature 0 °C

DIMENSIONS

L	506 mm
---	--------

W	203 mm
---	--------

LM	236.4 mm
----	----------



MW	165 mm
----	--------

Cb-1	175 mm
------	--------

Cb-2	231.5 mm
------	----------

Ct-1	56.5 mm
------	---------

Cr-1	167 mm
L	506 mm
H-1	231.5 mm
W-1	203 mm
ØDi-1	1 1/2 "
ØDi-2	1 1/4 "
O	9 mm
Cb-1	175 mm
G-1	165 mm
Cl-1	167 mm
Mr	269.6 mm
H	231.5 mm

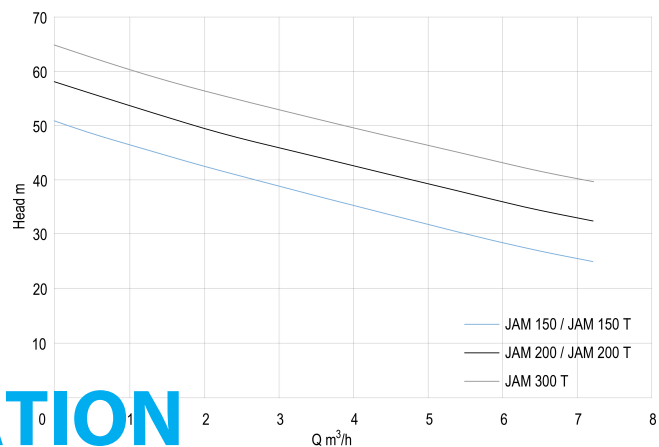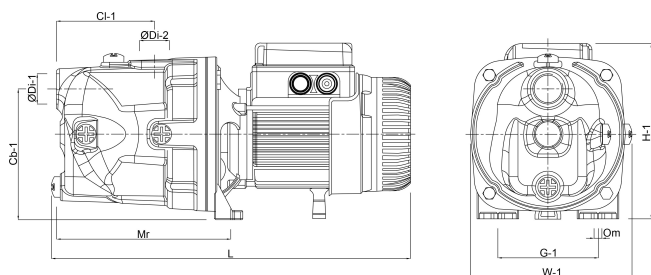

PRODUCT INFORMATION

Uses: Self-priming centrifugal pump for water supplies (even if mixed with gas) in small household systems, connected to autoclave tanks, for transferring liquids and emptying tanks; also used for gardening. Construction features: Cast iron pump casing with threaded inlet and outlet; cast iron motor bracket; impeller in Noryl or in brass; ceramic - graphite mechanical seal; motor shaft in AISI 416 steel; world leading brand ball bearings; liquid temperature range 0 - 50 °C; max. operating pressure 8 bar. MOTOR2 pole electric induction motor for continuous operations; stator made with low-loss laminated electric sheet steel; insulation Class F; IP 44 protection level; thermal protection for single-phase models; the user is responsible for supplying protection for the three-phase models.

Last modified date: 06/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>