

**Flotide Sand filter polyester
gelcoated 50 mm / 1 1/2"
metric/imperial glue socket
2,5bar green type SMG500
(7011874)**



FLOTIDE

TECHNICAL SPECIFICATIONS

Colour	green
Material	polyester gelcoated
Connection	metric/imperial glue socket
Pressure	2,5 bar
Max. temp.	43 °C
Type	SMG500
Size	50 mm / 1 1/2"
Diameter	516 mm
Weight	18.3 kg
Sand	100 kg
Filter area	0.2 m ²
Max flow rate	10 m ³ /h
Max. pool vol.	50 m ³

DIMENSIONS

B	21 " inch
A	845 mm

B


516 mm

C

487 mm

D

424 mm

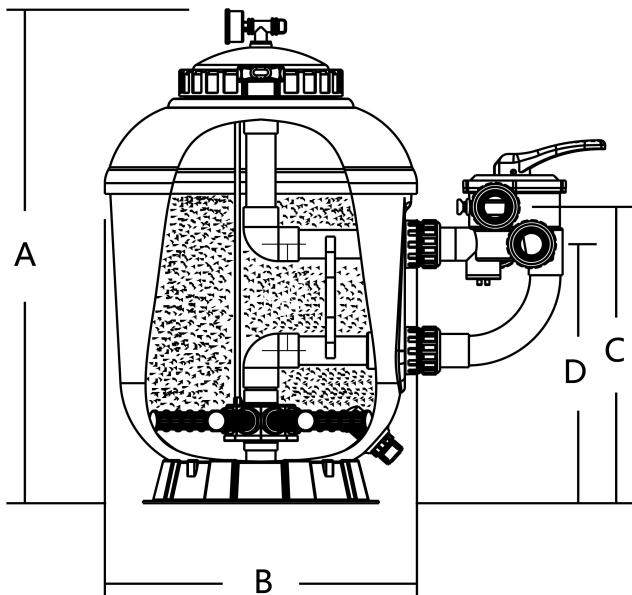

PRODUCT INFORMATION

This Gelcoat filter tank has been well-received by the industry due to the durable, trustworthy performance and smooth gelcoat fibreglass finish. With UV-resistant material used, it is able to operate under prolonged sunlight for years of reliability. "SMG" Series side mount filters are equipped with a six-position, side mount multiport valve and ABS laterals. Switch off the pump before each lever action.

- Non corrosive gel coat fibreglass tank
- Smooth finish
- ABS internal pipe work construction
- Transparent lid provides clear view of filter media
- Air release valve
- 6-way multiport sidemount valve
- Warranty period: 2 years

Last modified date: 09/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>