

**Flotide Sand filter polyester
gelcoated 50 mm / 1 1/2"
metric/imperial glue socket
2,5bar green type SMG500
(7011874)**



FLOTIDE



bosta
bringing water to life

TECHNICAL SPECIFICATIONS

| | |
|----------------|-----------------------------|
| Colour | green |
| Material | polyester gelcoated |
| Connection | metric/imperial glue socket |
| Pressure | 2,5 bar |
| Max. temp. | 43 °C |
| Type | SMG500 |
| Size | 50 mm / 1 1/2" |
| Diameter | 516 mm |
| Weight | 18.3 kg |
| Sand | 100 kg |
| Filter area | 0.2 m ² |
| Max flow rate | 10 m ³ /h |
| Max. pool vol. | 50 m ³ |


DIMENSIONS

| | |
|---|-----------|
| A | 845 mm |
| B | 21 " inch |

B 516 mm

C 487 mm

D 424 mm

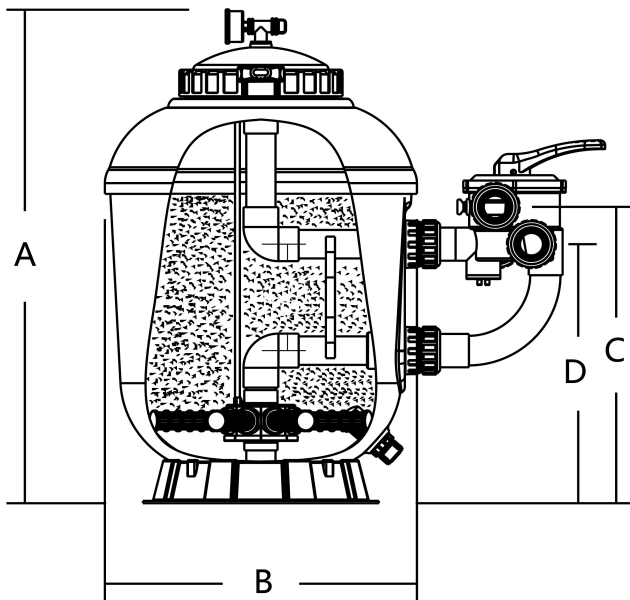

PRODUCT INFORMATION

This Gelcoat filter tank has been well-received by the industry due to the durable, trustworthy performance and smooth gelcoat fibreglass finish. With UV-resistant material used, it is able to operate under prolonged sunlight for years of reliability. "SMG" Series side mount filters are equipped with a six-position, side mount multiport valve and ABS laterals. Switch off the pump before each lever action.

- Non corrosive gel coat fibreglass tank
- Smooth finish
- ABS internal pipe work construction
- Transparent lid provides clear view of filter media
- Air release valve
- 6-way multiport sidemount valve
- Warranty period: 2 years

Last modified date: 22/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>