Profec Gate valve cast iron GG 25 powder coated DN40 DIN flange 10bar DN40 black PN10/16 type 200/N (7036469)

PROFEC

bosta
bringing water to life

TECHNICAL SPECIFICATIONS

Colour	black
Type	200/N
Material	cast iron GG 25
Surface treatment	powder coated
Operation	handwheel
Colour lever	black
Handle material	cast iron
Material valve	cast iron
Material spindle	stainless steel
Seat material	brass
Material housing	cast iron GG 25
Material seal	metal
Connection	DIN flange
Max. temperature	100 °C
Flange according to DIN	DIN 2501/PN10
Pressure	10 bar
Size	DN40

bosta
bringing water to life

Flange	PN10/16
PCD	110 mm
Holes	4

DIMENSIONS

Construction length	din 3352/2c/f4
L	140 mm
L	140 mm
PCD	110 mm
Ct-1	235 mm
R	160 mm

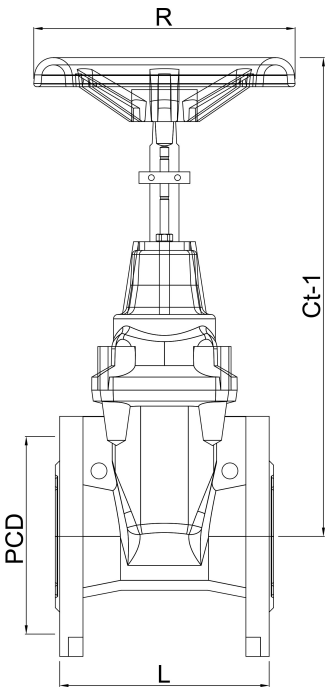

bosta
bringing water to life

PRODUCT INFORMATION

Metal seated cast iron gate valve, non rising stem.

Last modified date: 09/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

bosta
bringing water to life