

Pentair Pool filter set PE 50 mm glue socket 2bar 5,5A 230VAC black type FS-22A6-FF19R (7017531)



 PENTAIR

TECHNICAL SPECIFICATIONS

Colour black

Material PE

Connection glue socket

Voltage 230VAC

Frequency 50 Hz

Pressure 2 bar

IP value IP44

Max. temp. 35 °C

Type FS-22A6-FF19R

Size 50 mm

Diameter 560 mm

Weight 24 kg

Sand 120 kg

Ampere 5,5 A

Max flow rate 12 m³/h

Pump FreeFlo FF19R



Max. pool vol. 60 m³

DIMENSIONS

A 800 mm

B 22 " inch

B 1090 mm

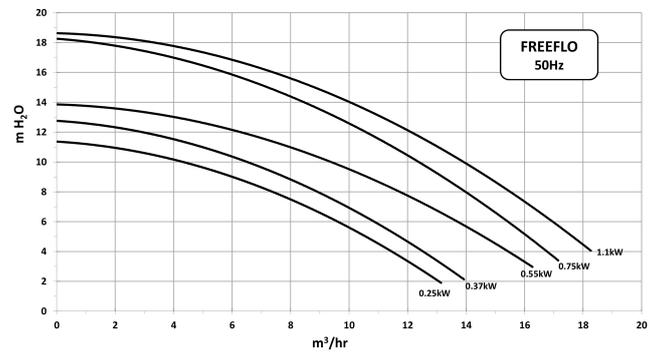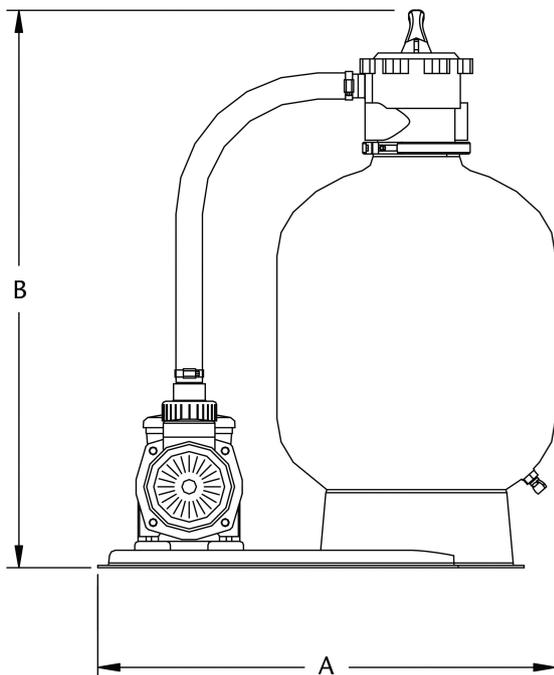

PRODUCT INFORMATION

Strong and durable thermoplastic tank with 6-way valve and FreeFlo centrifugal pump. The pump has a large pre-filter for a longer service interval. Complete set mounted on a solid base.

Last modified date: 23/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>