

# VDL Ball valve PVC-U 25 mm glue socket 16bar DN20 grey type EIL viton (7018368)



**VL** Van de Lande

# TECHNICAL SPECIFICATIONS

|        |      |
|--------|------|
| Colour | grey |
|--------|------|

|      |           |
|------|-----------|
| Type | EIL viton |
|------|-----------|

|          |       |
|----------|-------|
| Material | PVC-U |
|----------|-------|

|           |       |
|-----------|-------|
| Operation | lever |
|-----------|-------|

|              |       |
|--------------|-------|
| Colour lever | green |
|--------------|-------|

|                 |       |
|-----------------|-------|
| Handle material | PVC-U |
|-----------------|-------|

|                      |        |
|----------------------|--------|
| Housing construction | 2-part |
|----------------------|--------|

|                  |       |
|------------------|-------|
| Material housing | PVC-U |
|------------------|-------|

|               |       |
|---------------|-------|
| Material seal | viton |
|---------------|-------|

|            |             |
|------------|-------------|
| Connection | glue socket |
|------------|-------------|

|                  |       |
|------------------|-------|
| Max. temperature | 60 °C |
|------------------|-------|

Minimum medium temperature 0 °C  
(continuous)

|                   |            |
|-------------------|------------|
| Temperature range | 0°C - 60°C |
|-------------------|------------|

|          |        |
|----------|--------|
| Pressure | 16 bar |
|----------|--------|

|      |       |
|------|-------|
| Size | 25 mm |
|------|-------|

|    |    |
|----|----|
| DN | 20 |
|----|----|

# DIMENSIONS

Lb 87 mm


ØDi-1 25 mm

ØDi-2 25 mm

Ct-1 55 mm

R 88 mm

ØDf 20 mm

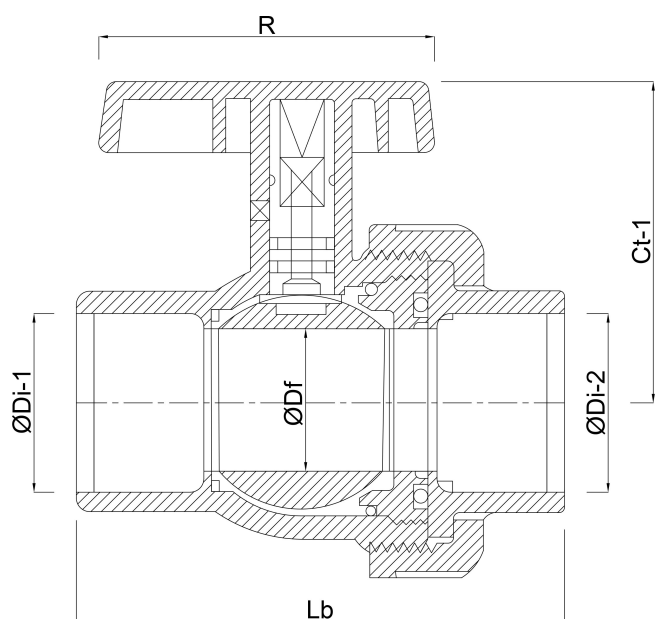

**Last modified date: 06/01/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road

Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>