

**DAB Submersible pump  
reinforced plastic 1" male  
thread 3,5A 230VAC green  
type Nova UP 600 M-A with  
float switch (7030945)**



# TECHNICAL SPECIFICATIONS

Colour green

Material reinforced plastic

Pump body technopolymer

Material impeller 1 technopolymer

Connection male thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C  
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Minimum ambient temperature 0 °C

Type Nova UP 600 M-A

Output Power 0,7 HP

Max. head 9,8 m

Size 1"

Float included

Power	0.52 kW
-------	---------

Ampere	3,5 A
--------	-------

Max flow rate	13.5 m <sup>3</sup> /h
---------------	------------------------

BEP Capacity	10.8
--------------	------

BEP Head	5.74
----------	------

PORlh	7.17
-------	------

PORhh	4.47
-------	------

PORlq	7.56
-------	------

PORhq	12.96
-------	-------



## DIMENSIONS

Db	160 mm
----	--------

H-1	111.6 mm
-----	----------

H-2	332 mm
-----	--------

ØDi-1	1 "
-------	-----

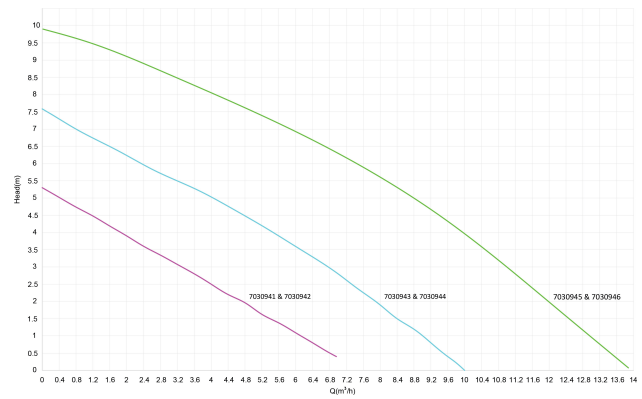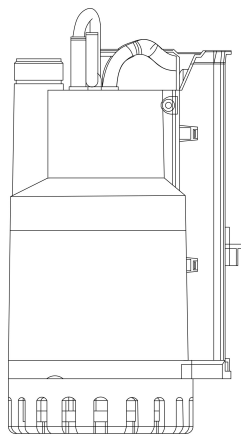

# PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.

Pump can be used with liquids containing solid particles of up to 10 mm in size.

Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.

Dry operation of max. 1 minute.

**Last modified date: 12/06/2026**

Bosta UK Ltd.  
 Reflection House  
 Olding Road  
 Bury St. Edmunds  
 Suffolk  
 IP33 3TA  
 T +44 (0) 1284 716580  
 E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>