

**Profec Butterfly valve ductile  
iron (GGG40) epoxy coating  
DN50 flange 10bar DN50 blue  
PN6/10/16 type 600 (0401850)**




# TECHNICAL SPECIFICATIONS

|                   |                      |
|-------------------|----------------------|
| Colour            | blue                 |
| Type              | 600                  |
| Material          | ductile iron (GGG40) |
| Surface treatment | epoxy coating        |
| Operation         | lever                |
| Colour lever      | black                |
| Handle material   | malleable cast iron  |
| Material valve    | ductile iron         |
| Material spindle  | stainless steel 316  |
| Seat material     | EPDM                 |
| Material housing  | ductile iron (GGG40) |
| Material seal     | EPDM                 |
| Connection        | flange               |
| Flange            | PN6/10/16            |
| Temperature range | 0°C - 90°C           |
| Pressure          | 10 bar               |
| Size              | DN50                 |

|           |        |
|-----------|--------|
| DN        | 50     |
| Width     | 43 mm  |
| Height    | 275 mm |
| Torque    | 10 Nm  |
| Bolt hole | 18 mm  |
| Holes     | 4      |

## DIMENSIONS

|                     |                       |
|---------------------|-----------------------|
| Construction length | din 3202 k1, iso 5752 |
| Ct-1                | 190 mm                |
| PCD                 | 110/125 mm            |
| R                   | 260 mm                |
| W-1                 | 43 mm                 |
| W-2                 | 86 mm                 |

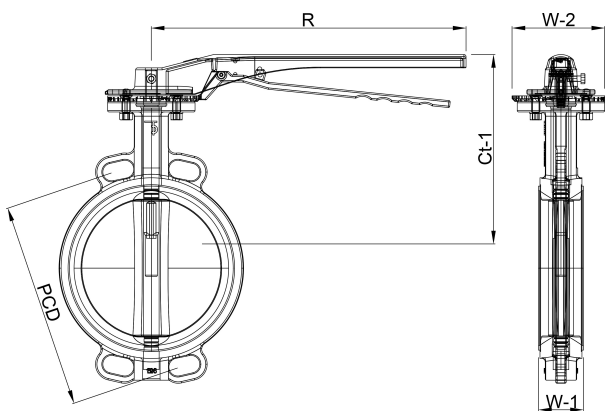

**Last modified date: 23/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>