

**DAB Jet pump stainless steel  
304 1" female thread 8bar 6,6A  
230VAC green self-priming  
with press control type  
JETINOX 132 Control D  
(7030932)**



# TECHNICAL SPECIFICATIONS

Colour green

Material stainless steel 304

Pump body stainless steel 304

Material impeller 1 technopolymer A

Model self-priming with press control

Connection female thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C  
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Suction 1 "

Type JETINOX 132 Control D

Size 1"

Power 0.75 kW

MWC 48,3

Ampere	6,6 A
--------	-------

Max flow rate	4.8 m <sup>3</sup> /h
---------------	-----------------------

BEP Capacity	3.5
--------------	-----

BEP Head	33
----------	----

PORlh	37.5
-------	------

PORhh	29.8
-------	------

PORlq	2.5
-------	-----

PORhq	4.2
-------	-----

## DIMENSIONS

Cb-1	98.5 mm
------	---------

Cb-1	144 mm
------	--------

Cl-1	122 mm
------	--------

Cr-1	87 mm
------	-------

Ct-1	98.5 mm
------	---------

G-1	111 mm
-----	--------

H	197 mm
---	--------

H	197 mm
---	--------

L	424 mm
---	--------

L 440 mm

LM 424 mm




Mr 207 mm

O 9 mm

W-1 174 mm

ØDi-1 1 "

ØDi-2 1 "

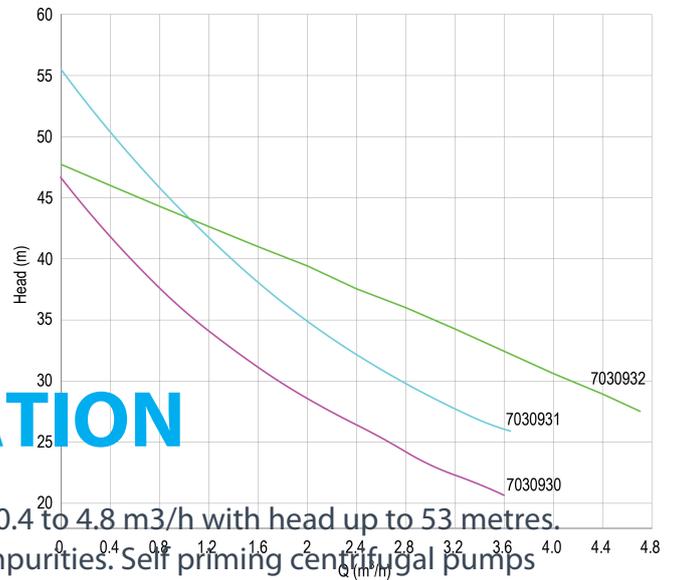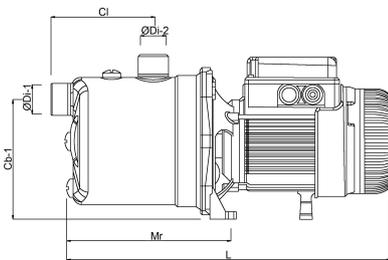

## PRODUCT INFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m<sup>3</sup>/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

**Last modified date: 24/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk

IP33 3TA

T +44 (0) 1284 716580

E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)

<http://www.bosta.com>