

**DAB Submersible pump
reinforced plastic 1" male
thread 1,5A 230VAC green
type Nova UP 300 M-A with
float switch (7030943)**



TECHNICAL SPECIFICATIONS

Colour green

Material reinforced plastic

Pump body technopolymer

Material impeller 1 technopolymer

Connection male thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Minimum ambient temperature 0 °C

Type Nova UP 300 M-A

Output Power 0,3 HP

Max. head 7,6 m

Size 1"

Float included

Power	0.21 kW
-------	---------

Ampere	1,5 A
--------	-------

Max flow rate	7.5 m ³ /h
---------------	-----------------------

BEP Capacity	8.04
--------------	------

BEP Head	3.83
----------	------

PORlh	4.83
-------	------

PORhh	3.15
-------	------

PORlq	5.628
-------	-------

PORhq	9.648
-------	-------



DIMENSIONS

Db	160 mm
----	--------

H-1	75.9 mm
-----	---------

H-2	295.3 mm
-----	----------

ØDi-1	1 "
-------	-----

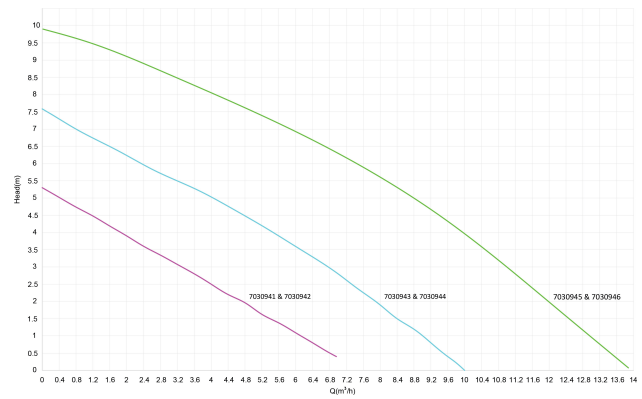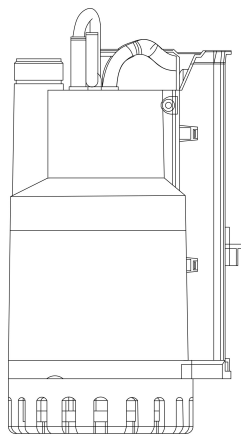

PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.

Pump can be used with liquids containing solid particles of up to 10 mm in size.

Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.

Dry operation of max. 1 minute.

Last modified date: 12/06/2026

Bosta UK Ltd.
 Reflection House
 Olding Road
 Bury St. Edmunds
 Suffolk
 IP33 3TA
 T +44 (0) 1284 716580
 E enquiries@bosta.co.uk
<http://www.bosta.com>