

**Profec Gate valve cast iron GG  
25 powder coated DN250 DIN  
flange 10bar DN250 black  
PN10 type 200/N (7036477)**



# TECHNICAL SPECIFICATIONS

|                         |                 |
|-------------------------|-----------------|
| Colour                  | black           |
| Type                    | 200/N           |
| Material                | cast iron GG 25 |
| Surface treatment       | powder coated   |
| Operation               | handwheel       |
| Colour lever            | black           |
| Handle material         | cast iron       |
| Material valve          | cast iron       |
| Material spindle        | stainless steel |
| Seat material           | brass           |
| Material housing        | cast iron GG 25 |
| Material seal           | metal           |
| Connection              | DIN flange      |
| Max. temperature        | 100 °C          |
| Flange according to DIN | DIN 2501/PN10   |
| Pressure                | 10 bar          |
| Size                    | DN250           |

Flange PN10

PCD 350 mm

Holes 12

## DIMENSIONS

Construction length din 3352/2c/f4


Ct-1 650 mm

L 250 mm

L 250 mm

PCD 350 mm

R 320 mm

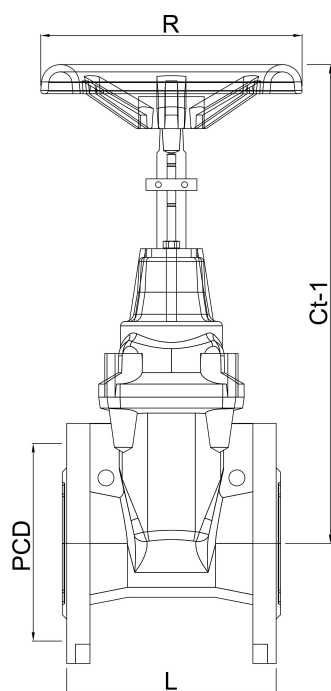

# PRODUCT INFORMATION

Metal seated cast iron gate valve, non rising stem.

**Last modified date: 24/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>