

**Profec Gate valve cast iron GG  
25 varnished DN65 DIN flange  
10bar DN65 black PN10/16  
type 200 (0400762)**



# TECHNICAL SPECIFICATIONS

|                         |                 |
|-------------------------|-----------------|
| Colour                  | black           |
| Type                    | 200             |
| Material                | cast iron GG 25 |
| Surface treatment       | varnished       |
| Operation               | handwheel       |
| Colour lever            | black           |
| Handle material         | cast iron       |
| Material valve          | cast iron       |
| Material spindle        | stainless steel |
| Seat material           | brass           |
| Material housing        | cast iron GG 25 |
| Material seal           | brass           |
| Connection              | DIN flange      |
| Max. temperature        | 100 °C          |
| Flange according to DIN | DIN 2501/PN10   |
| Pressure                | 10 bar          |
| Size                    | DN65            |

Length 170 mm

Flange PN10/16

Outer  $\varnothing$  185 mm

PCD 145 mm

Holes 4

## DIMENSIONS

Construction length din 3352/2c/f4


Ct-1 258 mm

L 170 mm

L 170 mm

PCD 145 mm

R 160 mm

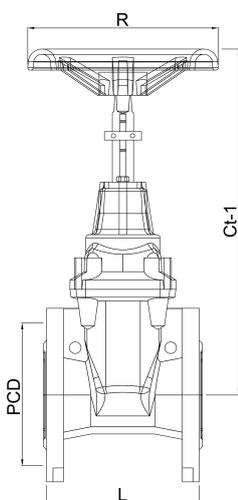

**Last modified date: 21/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>