

**Profec Non return valve ductile  
iron (GGG40) epoxy coating  
DN250 DIN flange 10bar  
DN250 blue PN10 (0401936)**



# TECHNICAL SPECIFICATIONS

Colour	blue
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Material cover	cast iron GG 40
Material housing	ductile iron (GGG40)
Material seal	NBR
Connection	DIN flange
Gasket	NBR
DIN Standard	DIN 2501
Temperature range	-20°C - 100°C
RAL number	RAL5017
Opening pressure	1 bar
Pressure	10 bar
Ball material	ductile iron/NBR
Size	DN250
Length	600 mm
DN	250

Flange PN10

Outer  $\varnothing$  395 mm

Holes 12

## DIMENSIONS


Construction length din 3202 f6

Ct-1 471 mm

Install. length din 3202 f6

L 600 mm

PCD 350/355 mm

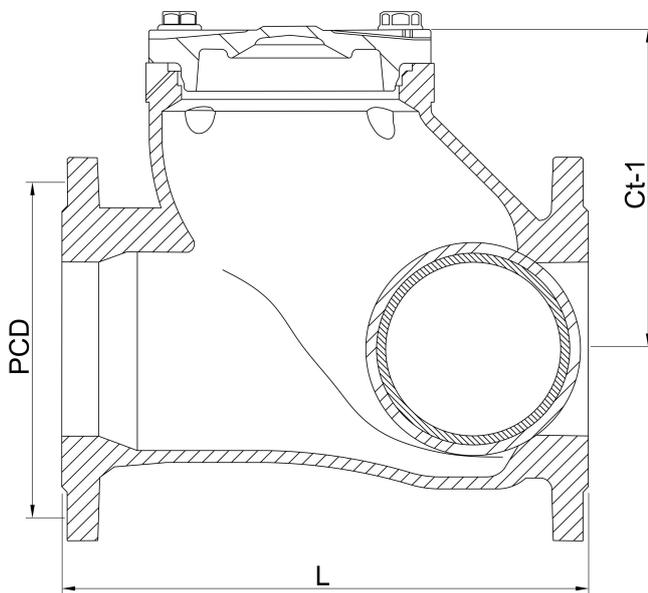

**Last modified date: 21/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>