

Pentair Sand filter fibreglass reinforced polyester 2" female thread 3,5bar blue type F-36S8-NEOCPPRO (7025518)



Filter	Size	Flow	Head	Power
1/2"	1/2"	1.5	15	1/2 HP
3/4"	3/4"	2.5	25	3/4 HP
1"	1"	4.0	40	1 HP
1 1/4"	1 1/4"	6.0	60	1 1/4 HP
1 1/2"	1 1/2"	8.0	80	1 1/2 HP
2"	2"	12.0	120	2 HP
2 1/2"	2 1/2"	18.0	180	3 HP
3"	3"	24.0	240	4 HP
3 1/2"	3 1/2"	30.0	300	5 HP
4"	4"	36.0	360	6 HP
4 1/2"	4 1/2"	42.0	420	7 HP
5"	5"	48.0	480	8 HP
5 1/2"	5 1/2"	54.0	540	9 HP
6"	6"	60.0	600	10 HP
6 1/2"	6 1/2"	66.0	660	11 HP
7"	7"	72.0	720	12 HP
7 1/2"	7 1/2"	78.0	780	13 HP
8"	8"	84.0	840	14 HP
8 1/2"	8 1/2"	90.0	900	15 HP
9"	9"	96.0	960	16 HP
9 1/2"	9 1/2"	102.0	1020	17 HP
10"	10"	108.0	1080	18 HP
10 1/2"	10 1/2"	114.0	1140	19 HP
11"	11"	120.0	1200	20 HP
11 1/2"	11 1/2"	126.0	1260	21 HP
12"	12"	132.0	1320	22 HP
12 1/2"	12 1/2"	138.0	1380	23 HP
13"	13"	144.0	1440	24 HP
13 1/2"	13 1/2"	150.0	1500	25 HP
14"	14"	156.0	1560	26 HP
14 1/2"	14 1/2"	162.0	1620	27 HP
15"	15"	168.0	1680	28 HP
15 1/2"	15 1/2"	174.0	1740	29 HP
16"	16"	180.0	1800	30 HP
16 1/2"	16 1/2"	186.0	1860	31 HP
17"	17"	192.0	1920	32 HP
17 1/2"	17 1/2"	198.0	1980	33 HP
18"	18"	204.0	2040	34 HP
18 1/2"	18 1/2"	210.0	2100	35 HP
19"	19"	216.0	2160	36 HP
19 1/2"	19 1/2"	222.0	2220	37 HP
20"	20"	228.0	2280	38 HP
20 1/2"	20 1/2"	234.0	2340	39 HP
21"	21"	240.0	2400	40 HP
21 1/2"	21 1/2"	246.0	2460	41 HP
22"	22"	252.0	2520	42 HP
22 1/2"	22 1/2"	258.0	2580	43 HP
23"	23"	264.0	2640	44 HP
23 1/2"	23 1/2"	270.0	2700	45 HP
24"	24"	276.0	2760	46 HP
24 1/2"	24 1/2"	282.0	2820	47 HP
25"	25"	288.0	2880	48 HP
25 1/2"	25 1/2"	294.0	2940	49 HP
26"	26"	300.0	3000	50 HP
26 1/2"	26 1/2"	306.0	3060	51 HP
27"	27"	312.0	3120	52 HP
27 1/2"	27 1/2"	318.0	3180	53 HP
28"	28"	324.0	3240	54 HP
28 1/2"	28 1/2"	330.0	3300	55 HP
29"	29"	336.0	3360	56 HP
29 1/2"	29 1/2"	342.0	3420	57 HP
30"	30"	348.0	3480	58 HP
30 1/2"	30 1/2"	354.0	3540	59 HP
31"	31"	360.0	3600	60 HP
31 1/2"	31 1/2"	366.0	3660	61 HP
32"	32"	372.0	3720	62 HP
32 1/2"	32 1/2"	378.0	3780	63 HP
33"	33"	384.0	3840	64 HP
33 1/2"	33 1/2"	390.0	3900	65 HP
34"	34"	396.0	3960	66 HP
34 1/2"	34 1/2"	402.0	4020	67 HP
35"	35"	408.0	4080	68 HP
35 1/2"	35 1/2"	414.0	4140	69 HP
36"	36"	420.0	4200	70 HP
36 1/2"	36 1/2"	426.0	4260	71 HP
37"	37"	432.0	4320	72 HP
37 1/2"	37 1/2"	438.0	4380	73 HP
38"	38"	444.0	4440	74 HP
38 1/2"	38 1/2"	450.0	4500	75 HP
39"	39"	456.0	4560	76 HP
39 1/2"	39 1/2"	462.0	4620	77 HP
40"	40"	468.0	4680	78 HP
40 1/2"	40 1/2"	474.0	4740	79 HP
41"	41"	480.0	4800	80 HP
41 1/2"	41 1/2"	486.0	4860	81 HP
42"	42"	492.0	4920	82 HP
42 1/2"	42 1/2"	498.0	4980	83 HP
43"	43"	504.0	5040	84 HP
43 1/2"	43 1/2"	510.0	5100	85 HP
44"	44"	516.0	5160	86 HP
44 1/2"	44 1/2"	522.0	5220	87 HP
45"	45"	528.0	5280	88 HP
45 1/2"	45 1/2"	534.0	5340	89 HP
46"	46"	540.0	5400	90 HP
46 1/2"	46 1/2"	546.0	5460	91 HP
47"	47"	552.0	5520	92 HP
47 1/2"	47 1/2"	558.0	5580	93 HP
48"	48"	564.0	5640	94 HP
48 1/2"	48 1/2"	570.0	5700	95 HP
49"	49"	576.0	5760	96 HP
49 1/2"	49 1/2"	582.0	5820	97 HP
50"	50"	588.0	5880	98 HP
50 1/2"	50 1/2"	594.0	5940	99 HP
51"	51"	600.0	6000	100 HP



TECHNICAL SPECIFICATIONS

Colour	blue
Material	fibreglass reinforced polyester
Connection	female thread
Pressure	3,5 bar
Max. temp.	50 °C
Type	F-36S8-NEOCPPRO
Size	2"
Diameter	914 mm
Weight	37.5 kg
Sand	420 kg
Filter area	0.64 m ²
Max flow rate	32 m ³ /h
Max. pool vol.	160 m ³

DIMENSIONS


A	1160 mm
B	36 " inch

B 610 mm

C 1253 mm

D 565 mm

E 338 mm

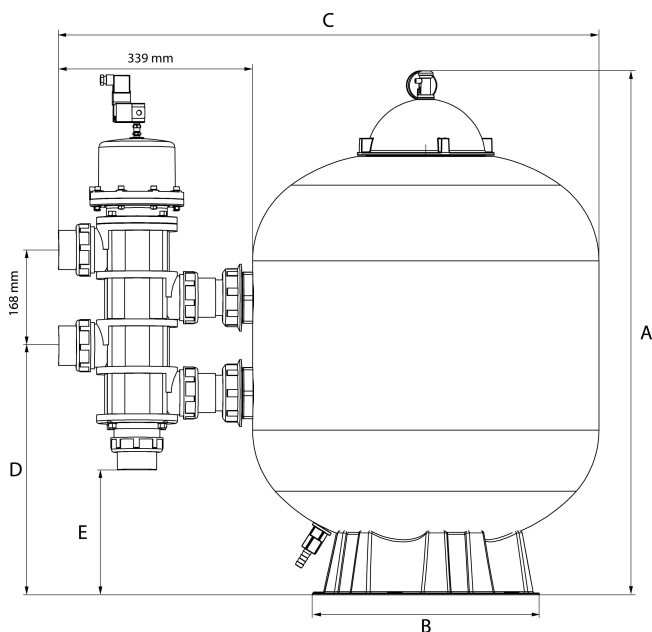

PRODUCT INFORMATION

One-piece, fibreglass-reinforced tank with UV-resistant coating and Pro Valve. The Pentair Pro Valve enables external control systems such as IntelliPool™ to perform automated filter backwash. Warranty period: Tank 10 years

Last modified date: 23/02/2026

Bosta UK Ltd.
Reflection House
Olding Road

Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>