

**Profec Gate valve cast iron  
GGG 50 epoxy coating DN300  
DIN flange 16bar blue PN10  
type 302 (7038250)**



# TECHNICAL SPECIFICATIONS

Colour	blue
Type	302
Material	cast iron GGG 50
Surface treatment	epoxy coating
Operation	handwheel
Colour lever	blue
Handle material	cast iron
Material valve	cast iron EPDM coated
Material spindle	stainless steel
Material housing	cast iron GGG 50
Material seal	NBR
Connection	DIN flange
Max. temperature	110 °C
RAL number	RAL5017
Flange according to DIN	DIN 2501/PN10
Pressure	16 bar
Max. temp.	120 °C

Size DN300

Length 270 mm

Flange PN10

Outer ø 457 mm

PCD 400/410 mm

Holes 12

## DIMENSIONS

Construction length din 3352/2c/f4


Ct-1 645 mm

L 270 mm

L 270 mm

PCD 400/410 mm

R 300 mm

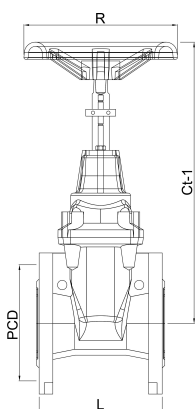

**Last modified date: 24/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>