

Grundfos Multi-stage centrifugal pump stainless steel DN35 DIN flange 7,9A 400VAC type CRI 5-29 A FGJ I V HQQV (7039748)



GRUNDFOS® 

TECHNICAL SPECIFICATIONS

Material	stainless steel
----------	-----------------

Shaft	stainless steel 316
-------	---------------------

Pump body	stainless steel 316
-----------	---------------------

Material impeller 1	stainless steel 304
---------------------	---------------------

Connection	DIN flange
------------	------------

Voltage	400VAC
---------	--------

Temperature range	-20°C - 90°C
-------------------	--------------

Maximum ambient temperature 40 °C

Minimum ambient temperature	0 °C
-----------------------------	------

Type	CRI 5-29 A FGJ I V HQQV
------	-------------------------

Output Power	5.5 HP
--------------	--------

Size	DN35
------	------

Power	4 kW
-------	------

Impellers	29
-----------	----

MWC	200
-----	-----

Ampere	7,9 A
--------	-------

Max flow rate	8.5 m ³ /h
---------------	-----------------------

Efficiency 88,1 %

Press 35

Motor RPM 2770

DIMENSIONS

Cb-1 75 mm

Cb-2 75 mm



H-1 1410 mm

L 250 mm

W-1 210 mm

ØDi-1 35 mm

ØDi-2 35 mm

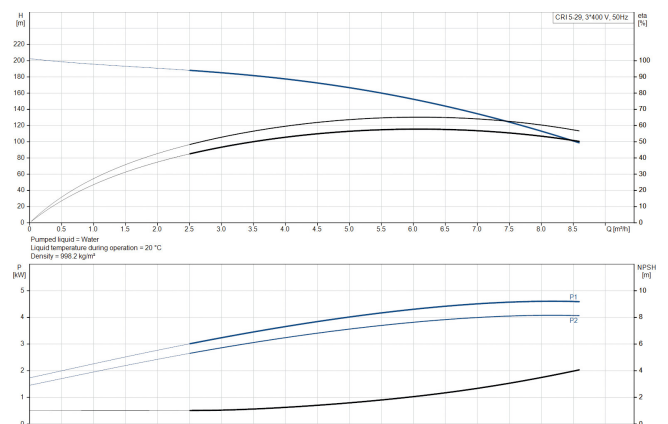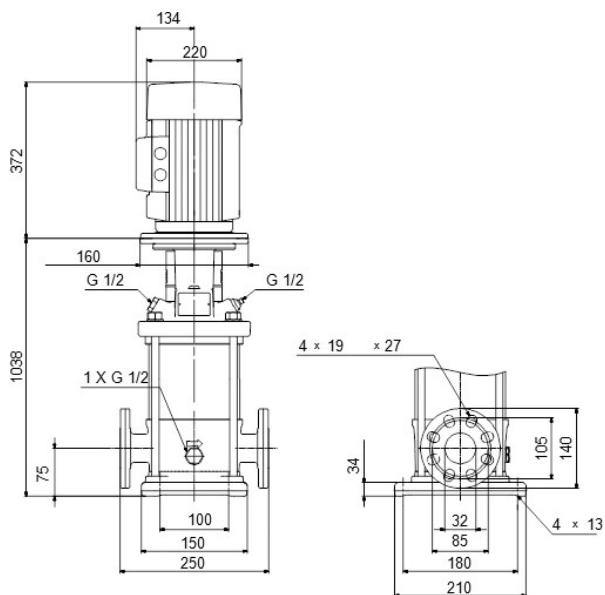

PRODUCT INFORMATION

Grundfos CRI pumps are vertical, non-self-priming, multistage, in-line, centrifugal pumps for installation in pipe systems and mounting on a foundation, suitable for industrial applications. This design provides a more compact pump design and pipework. CR pumps are designed for a variety of applications ranging from the pumping of potable water to the pumping of chemicals. The pumps are therefore suitable for a wide range of pumping systems where the performance and material of the pump meet specific demands.

Last modified date: 25/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>