DAB Submersible pump fibrereinforced plastic 1" female thread 1,9A 230VAC green type Feka 300 M-A with float switch (7038435)








TECHNICAL SPECIFICATIONS


Colour green fibre-reinforced plastic Material Pump body plastic fibre-reinforced plastic Material impeller 1 Connection female thread Voltage 230VAC Max. temperature 35° °C Minimum medium temperature 0 °C (continuous) 1 " **Press** Feka 300 M-A Type **Output Power** 0,3 HP 1" Size included **Float** Power 0.22 kW **MWC** 6,4 1,9 A Ampere




DIMENSIONS

H-1	71 mm
ØDi-1	1 1/4 "
H-2	329 mm
Db	180 mm





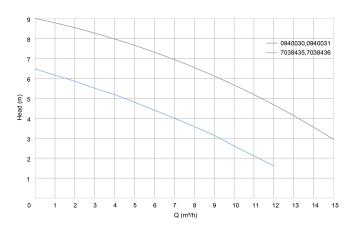

PRODUCT INFORMATION

For solids up to 25mm.

Technical features:

Pump body, protection cover, filter and fan in noryl fibreglass.

Motor axis and motor body in S/S steel.

Seal with 3 seal rings in oil chamber.

Automatic float switch.

With built in thermal safety.

With approximately 10 metres cable.



Last modified date: 06/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

