


Rainwater harvesting single family house & garden RM Favorit-SC 230VAC DVGW (7023555)

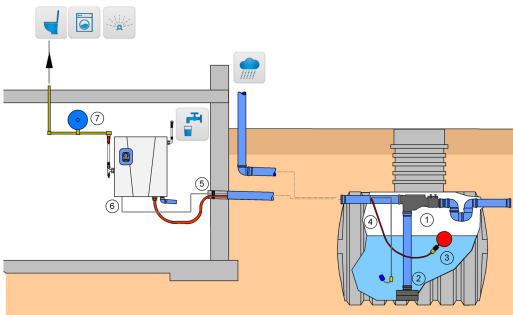

TECHNICAL SPECIFICATIONS

Approval	DVGW
Tank	295 ltr
Maximum flow	90 ltr/min
Voltage	230VAC
Pump	Multi-stage centrifugal pump
Max working pressure	5 bar
Capacity Pressure	2 - 4,5
Control Unit Pump	Multi-Stage centrifugal pump

PRODUCT INFORMATION

RWHS Model L is suitable when the amount of water use is unpredictable at a given time – up to 80 litres/minute. The heavy duty variable speed pump makes sure that system is coping with the variations in pressure. Reducing pump speed reduces pressure imparted to the fluid and this results in reducing the power consumption. Further to energy conservation there are also many benefits such as improved reliability, process performance and providing efficient flow control. The control system of RWHS Model L separates rainwater from the mains with the help of a break-tank with type AB airgap. Rainwater is given priority over mains and when the tank is empty, the control system automatically switches to mains.

Last modified date: 07/11/2025

Bosta UK Ltd.
Reflection House

Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>