

**Profec Gate valve cast iron
GGG 50 epoxy coating DN250
DIN flange 16bar blue PN10
type 302 (7038249)**




TECHNICAL SPECIFICATIONS

Colour	blue
Type	302
Material	cast iron GGG 50
Surface treatment	epoxy coating
Operation	handwheel
Colour lever	blue
Handle material	cast iron
Material valve	cast iron EPDM coated
Material spindle	stainless steel
Material housing	cast iron GGG 50
Material seal	NBR
Connection	DIN flange
Max. temperature	110 °C
RAL number	RAL5017
Flange according to DIN	DIN 2501/PN10
Pressure	16 bar
Max. temp.	120 °C

Size	DN250
Length	250 mm
Flange	PN10
Outer ø	403 mm
PCD	350/355 mm
Holes	12

DIMENSIONS

Construction length	din 3352/2c/f4
L	250 mm
L	250 mm
PCD	350/355 mm
Ct-1	555 mm
R	330 mm

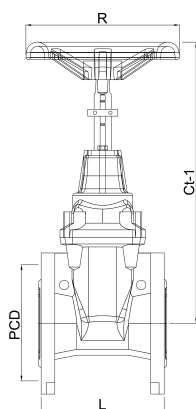

Last modified date: 10/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>