## Submersible pump plastic 1" x 1 1/4" male thread 2,4A 230VAC blue IPC 550 type IPC Flat suction (7031123)






## **TECHNICAL SPECIFICATIONS**

Colour	blue
Туре	IPC
Material	plastic
Output Power	0,73 HP
Pump body	plastic
Material impeller 1	noryl
Model	IPC 550
Connection	male thread
Туре	Flat suction
Float	not included
Voltage	230VAC
Max. temperature	35 ℃
Power	0.55 kW
MWC	6
Ampere	2,4 A
Max flow rate	6 m <sup>3</sup> /h
Maximum ambient temperature 40 °C	



Size	1" x 1 1/4"
BEP Capacity	3.6
BEP Head	3.7
PORIh	4.6
PORhh	2.9
PORIq	2.52
PORhq	4.32

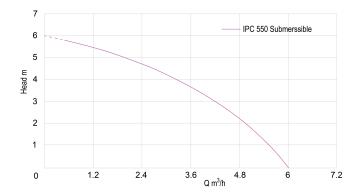

## **PRODUCT INFORMATION**

For clean water only. Max. immersion depth: 7 metres. Built-in non return valve with 3 adaptors for different connections. Comes with a cooling jacket so they can be partially submerged. Pumping can start when the water level is above 5mm. After removing the suction filter, water can be pumped until 1mm. Installation: vertical, fixed or portable. Operation: selection (1) Automatic or (2) Manual operating mode. 10 mtr cable and DIN plug

Last modified date: 08/11/2025



Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

