

**Profec Swing check valve with  
lifting device ductile iron  
(GGG40) epoxy coating DN80  
DIN flange 16bar DN80 blue  
PN10/16 (0402636)**



# TECHNICAL SPECIFICATIONS


Colour	blue
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Material cover	ductile iron
Material housing	ductile iron (GGG40)
Material seal	NBR
Connection	DIN flange
Gasket	NBR
Temperature range	0°C - 80°C
Pressure	16 bar
Capacity	93 m <sup>3</sup> /h
Size	DN80
Length	260 mm
DN	80
Flange	PN10/16
Outer ø	200 mm
PCD	160 mm

# DIMENSIONS

Ct-1 100 mm

L 260 mm

PCD 160 mm

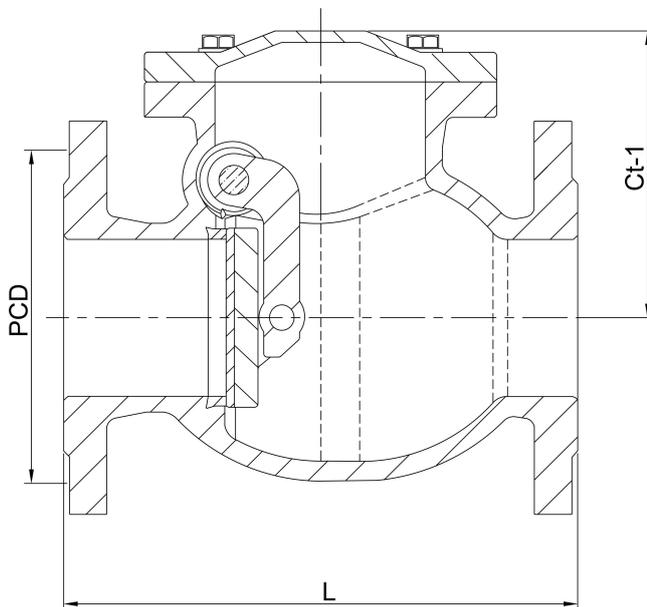

**Last modified date: 21/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)

<http://www.bosta.com>