

# DAB Deep well pump stainless steel 304 1" female thread 3,3A 230VAC with 15m cable and control box booster type Micra 50M oil cooling (7030892)



# TECHNICAL SPECIFICATIONS

Material	stainless steel 304
----------	---------------------

Connection	female thread
------------	---------------

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	noryl GFN2
---------------------	------------

Connection	female thread
------------	---------------

Type	oil cooling
------	-------------

Size	1 "
------	-----

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Outer ø	74 mm
---------	-------

Minimum medium temperature 0 °C (continuous)	
---	--

Max flow rate	2.7 m <sup>3</sup> /h
---------------	-----------------------

Press	1 "
-------	-----

BEP Capacity	1.8
--------------	-----


IP value	IP68
----------	------

Type	Micra 50M
------	-----------

Output Power	0,5 HP
Model	with 15m cable and control box booster
Size	1"
Weight	9 kg
Power	0.37 kW
Impellers	15
MWC	45
Ampere	3,3 A
BEP Head	26.9
PORlh	34.3
PORhh	18.8
PORlq	1.3
PORhq	2.2

## DIMENSIONS

ØDi-1	1 "
H-1	930 mm
Db	74 mm

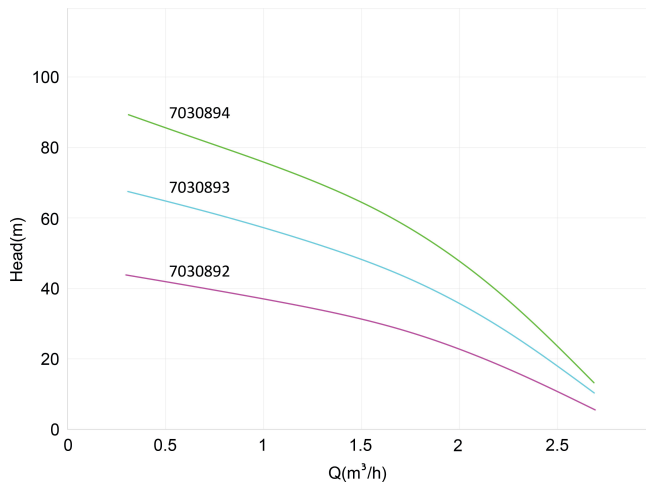

## PRODUCT INFORMATION

Includes assembled 15m cable and control box booster.<br> Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, and chemically neutral, with properties similar to water.<br> Maximum permitted amount of sand: 40 g/m3.<br> Installation: in 3" wells or larger, tanks and cisterns, vertical position. In case of horizontal installation, ensure a minimum load on the thrust assembly.

**Generated by date: 24/09/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>