

Heat exchanger stainless steel 316 1" x 2" female thread MF 260 (0891972)



TECHNICAL SPECIFICATIONS

Material stainless steel 316

Pressure secondary system 5 bar

Connection female thread

Pressure primary system 10 bar

Model MF 260

Capacity kW/h at $\Delta t=60^\circ\text{C}$ 75 kWh

Flow primary system 35 ltr/min

Flow secondary system 300 ltr/min

Size 1" x 2"

Size secondary system 2 "


Size primary system 1 "

DIMENSIONS

A 600 mm

B 129 mm

C 430 mm

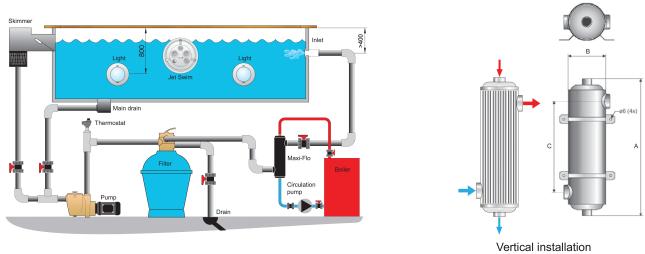

PRODUCT INFORMATION

Easy to install heat exchanger with tubes of European quality. The Maxi-Flo heat exchanger can only be positioned vertically. The Maxi-Flo heat exchanger can be used to heat your pool by using, for example, the heating of your home. A heat exchanger can quickly heat up the water. In 24 to 48 hours you can reach a water temperature of 28°C. The heat exchanger is therefore an excellent solution if your pool is not used frequently (e.g. weekends only). The Maxi-Flo heat exchangers are also compatible with low temperature circuits of existing geothermal systems or heat pumps. Suitable for chlorine based pools.

Last modified date: 06/11/2025

Bosta UK Ltd.
 Reflection House
 Olding Road
 Bury St. Edmunds
 Suffolk
 IP33 3TA
 T +44 (0) 1284 716580
 E enquiries@bosta.co.uk
<http://www.bosta.com>