# DAB Submersible pump reinforced plastic 1" male thread 0,9A 230VAC green type Nova UP 180 M-A with float switch (7030941)

DAB WATER•TECHNOLOGY

bosta bringing water to life

# TECHNICAL SPECIFICATIONS

| | |
|---|---|
| Colour | green |
| Material | reinforced plastic |
| Pump body | technopolymer |
| Material impeller 1 | technopolymer |
| Connection | male thread |
| Voltage | 230VAC |
| Max. temperature | 35 °C |
| Minimum medium temperature (continuous) | 0 °C |
| Press | 1 " |
| Maximum ambient temperature | 40 °C |
| Minimum ambient temperature | 0 °C |
| Type | Nova UP 180 M-A |
| Output Power | 0,2 HP |
| Size | 1" |
| Float | included |
| Power | 0.12 kW |

| | |
|---|---|
| MWC | 5,2 |
| Ampere | 0,9 A |
| Max flow rate | 7 $m^3/h$ |
| BEP Capacity | 3.2 |
| BEP Head | 2.81 |
| PORlh | 3.54 |
| PORhh | 2.22 |
| PORlq | 2.24 |
| PORhq | 3.84 |

# DIMENSIONS

| | |
|---|---|
| H-1 | 75.9 mm |
| ØDi-1 | 1 " |
| H-2 | 295.3 mm |
| Db | 160 mm |

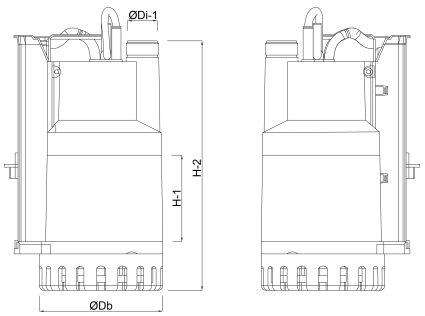


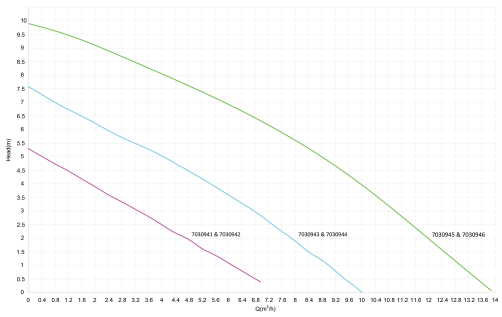


bosta
bringing water to life

# PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.
Pump can be used with liquids containing solid particles of up to 10 mm in size.
Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.
Dry operation of max. 1 minute.

## Last modified date: 08/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

bosta
bringing water to life