

Ball valve PVC-U 50 mm glue socket 16bar DN40 grey type AK (0161504)



TECHNICAL SPECIFICATIONS

Colour grey

Type AK

Material PVC-U

Operation lever

Colour lever red

Handle material PVC-U

Housing construction 3-part

Material housing PVC-U

Material seal PE/EPDM

Connection glue socket

Max. temperature 60 °C

Minimum medium temperature 0 °C
(continuous)

Size 50 mm

DN 40

Pressure 16 bar

DIMENSIONS

Ct-1 93 mm


Lb 148 mm

R 65 mm

ØDf 40 mm

ØDi-1 50 mm

ØDi-2 50 mm

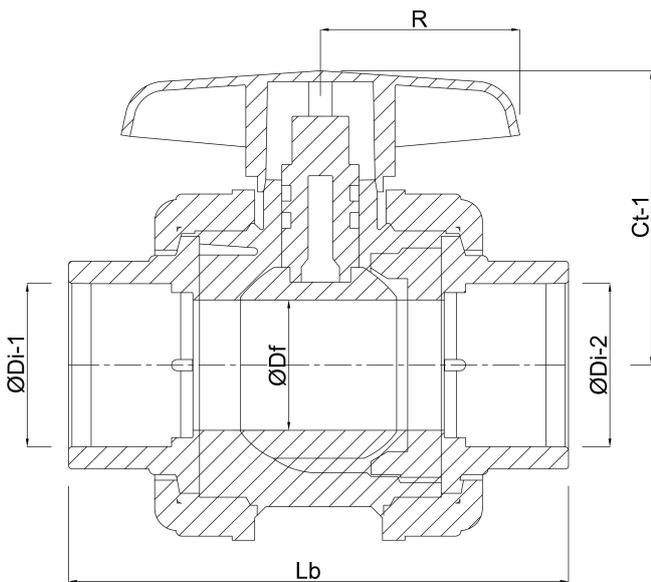

Last modified date: 20/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds

Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>