

# Ball valve PVC-U 40 mm glue socket 16bar DN32 grey type AK (0161503)



# TECHNICAL SPECIFICATIONS

Colour grey

Type AK

Material PVC-U

Operation lever

Colour lever red

Handle material PVC-U

Housing construction 3-part

Material housing PVC-U

Material seal PE/EPDM

Connection glue socket

Max. temperature 60 °C

Minimum medium temperature 0 °C  
(continuous)

Size 40 mm

DN 32

Pressure 16 bar

# DIMENSIONS

Ct-1 93 mm


Lb 148 mm

R 54 mm

$\varnothing$ Df 32 mm

$\varnothing$ Di-1 40 mm

$\varnothing$ Di-2 40 mm

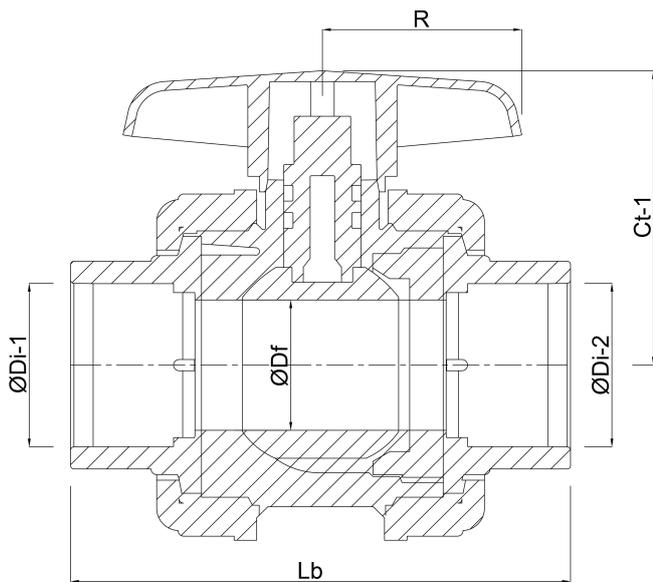

**Last modified date: 20/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds

Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>