

**PSH Commercial pool pump
PP/GF30 75 mm glue socket 9A
230VAC black type Maxi-20M
IE2 2HP (7039026)**



 P S H

TECHNICAL SPECIFICATIONS

| | |
|---------------------|------------------------------|
| Colour | black |
| Shaft | stainless steel 316 |
| Pump body | PP/GF30 |
| Material impeller 1 | PPO-GF30 |
| Material cover | polycarbonate |
| Material seal | carbon/ceramic |
| Connection | glue socket |
| Max. temperature | 40 °C |
| Width | 232 mm |
| Height | 325 mm |
| Frequency | 50 Hz |
| IP value | IP55 |
| Motor RPM | 2900 |
| Type | Maxi-20M IE2 |
| Capacity | 4,5 - 44,7 m ³ /h |
| Output Power | 2 HP |
| Max. head | 16 m |

Size 75 mm




Length 719 mm

Voltage 230VAC

Weight 19.6 kg

Power 1.5 kW

Ampere 9 A

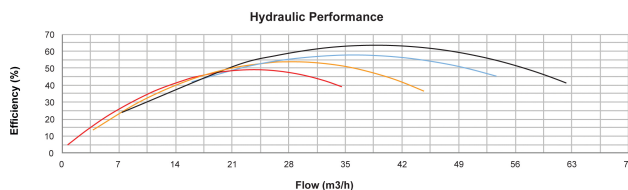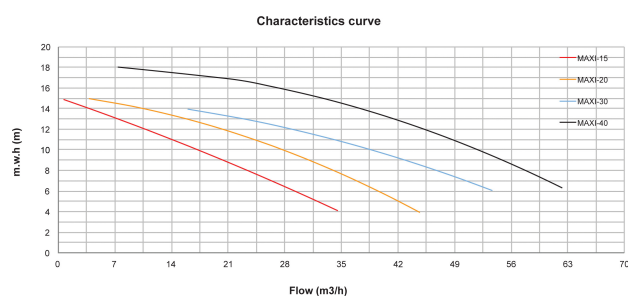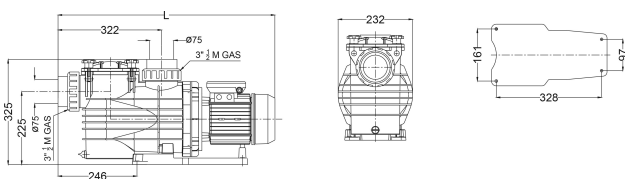

PRODUCT INFORMATION

The Maxi pumps are ideal pumps for medium sized commercial pools.

Features:

- Self-priming up to 2mwh
- Suitable for operation with salt chlorinators and sea water
- High efficiency three phase motor class IE3 according to regulation (EU) 2019/1781
- Thermal protector incorporated in single-phase version
- Insulation Class: F

- Protection: IP55 rating
- Motor: 50Hz/2900 rpm.
- Motor painting using cataphoresis
- Max temperature: 40°C

Last modified date: 12/06/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>