

**Profec Butterfly valve ductile
iron (GGG40) epoxy coating
DN50 flange 10bar DN50 blue
PN6/10/16 type 600 (0401850)**



TECHNICAL SPECIFICATIONS

Colour	blue
Type	600
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Operation	lever
Colour lever	black
Handle material	malleable cast iron
Material valve	ductile iron
Material spindle	stainless steel 316
Seat material	EPDM
Material housing	ductile iron (GGG40)
Material seal	EPDM
Connection	flange
Flange	PN6/10/16
Temperature range	0°C - 90°C
Pressure	10 bar
Size	DN50

DN	50
Width	43 mm
Height	275 mm
Torque	10 Nm
Bolt hole	18 mm
Holes	4

DIMENSIONS

Construction length din 3202 k1, iso 5752


W-1 43 mm

PCD 110/125 mm

Ct-1 190 mm

R 260 mm

W-2 86 mm

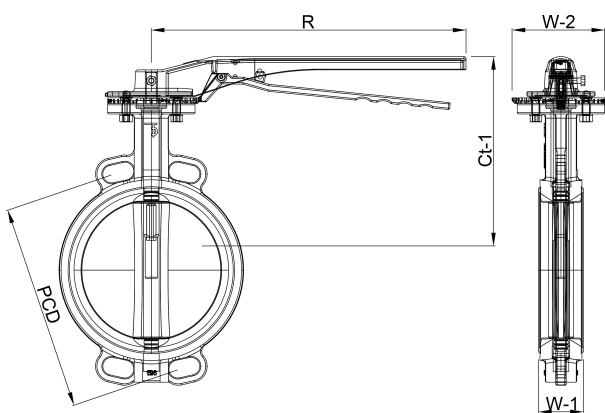

Last modified date: 16/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>