

**DAB Submersible pump
reinforced plastic 1" male
thread 0,9A 230VAC green
type Nova UP 180 M-NA
(7030942)**



TECHNICAL SPECIFICATIONS

Colour	green
--------	-------

Material	reinforced plastic
----------	--------------------

Pump body	technopolymer
-----------	---------------

Material impeller 1	technopolymer
---------------------	---------------

Connection	male thread
------------	-------------

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Minimum medium temperature 0 °C
(continuous)

Press	1 "
-------	-----

Maximum ambient temperature 40 °C

Minimum ambient temperature	0 °C
-----------------------------	------

Type	Nova UP 180 M-NA
------	------------------

Output Power	0,2 HP
--------------	--------

MWC	5,2 m
-----	-------

Size	1"
------	----

Float	not included
-------	--------------

Power	0.12 kW
-------	---------

Ampere	0,9 A
--------	-------

Max flow rate	7 m ³ /h
---------------	---------------------

BEP Capacity	3.2
--------------	-----

BEP Head	2.81
----------	------

PORlh	3.54
-------	------

PORhh	2.22
-------	------

PORlq	2.24
-------	------

PORhq	3.84
-------	------



DIMENSIONS

Db	160 mm
----	--------

H-1	75.9 mm
-----	---------

H-2	295.3 mm
-----	----------

ØDi-1	1 "
-------	-----

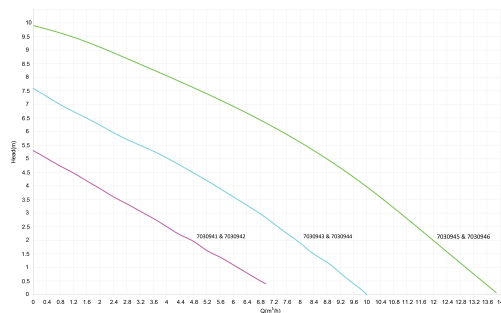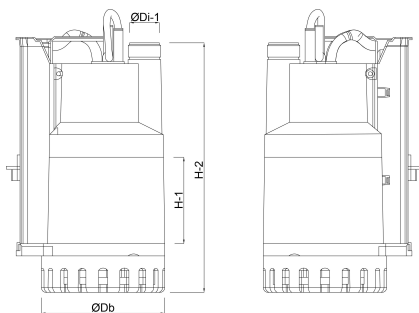

PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.

Pump can be used with liquids containing solid particles of up to 10 mm in size.

Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.

Dry operation of max. 1 minute.

Last modified date: 08/05/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>