

Submersible borehole pump 1" female thread 5A 230VAC type Ola 100 Auto with capacitor - cooling jacket (7031111)



TECHNICAL SPECIFICATIONS

Pump body stainless steel 304

Material impeller 1 noryl

Connection female thread

Type with capacitor - cooling jacket

Voltage 230VAC

Max. temperature 35 °C

Outer ø 98 mm

Press 1 "

Maximum ambient temperature 35 °C

IP value IP68

Type Ola 100 Auto

Output Power 1 HP

Max. head 50 m

Size 1"

Weight 14 kg

Power 0.8 kW

Impellers 8

Height 920 mm

Ampere 5 A

Max flow rate 4.8 m³/h

BEP Capacity 3.6

BEP Head 25

PORlh 36

PORhh 18

PORlq 2.52

PORhq 4.32




DIMENSIONS

Db 98 mm

H-1 920 mm

ØDi-1 1 "

ØDi-1

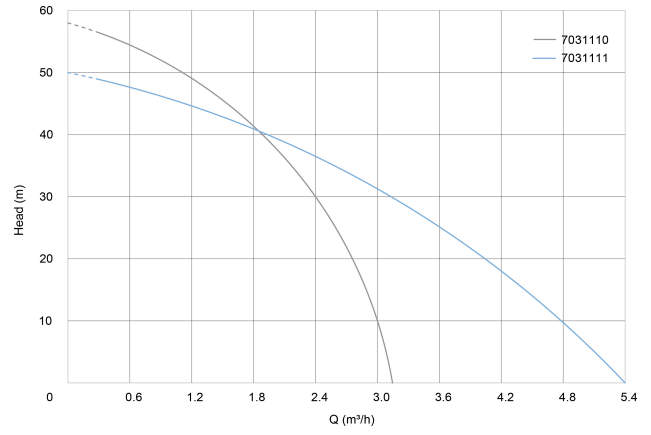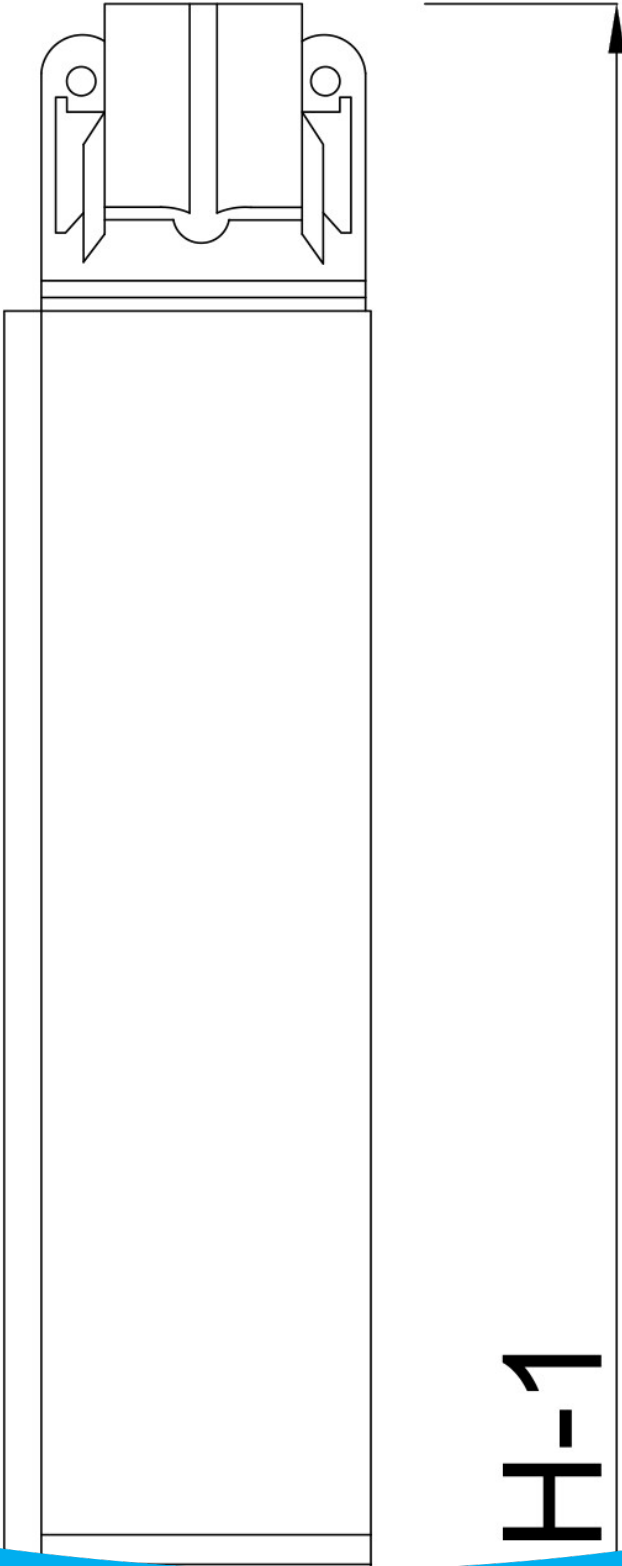

bosta
bringing water to life

PRODUCT INFORMATION

Submersible borehole pump equipped with an automatic pump control.

Built-in non return valve.

20 mtr cable, DIN plug without control box

Last modified date: 12/06/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>