

# Profec 3-piece ball valve stainless steel 316 3/8" female thread 69bar (0090952)



# TECHNICAL SPECIFICATIONS

|          |                     |
|----------|---------------------|
| Material | stainless steel 316 |
|----------|---------------------|

|           |       |
|-----------|-------|
| Operation | lever |
|-----------|-------|

|              |      |
|--------------|------|
| Colour lever | blue |
|--------------|------|

|                 |                 |
|-----------------|-----------------|
| Handle material | stainless steel |
|-----------------|-----------------|

|                  |                     |
|------------------|---------------------|
| Material housing | stainless steel 316 |
|------------------|---------------------|

|               |      |
|---------------|------|
| Material seal | PTFE |
|---------------|------|

|            |               |
|------------|---------------|
| Connection | female thread |
|------------|---------------|

|                   |               |
|-------------------|---------------|
| Temperature range | -10°C - 150°C |
|-------------------|---------------|

|          |        |
|----------|--------|
| Pressure | 69 bar |
|----------|--------|

|      |      |
|------|------|
| Size | 3/8" |
|------|------|

## DIMENSIONS

|      |       |
|------|-------|
| Ct-1 | 45 mm |
|------|-------|

|     |       |
|-----|-------|
| F-1 | 12 mm |
|-----|-------|

|     |       |
|-----|-------|
| F-2 | 12 mm |
|-----|-------|


|    |       |
|----|-------|
| Lb | 51 mm |
|----|-------|

|   |        |
|---|--------|
| R | 100 mm |
|---|--------|

ØDf 12.5 mm

ØDi-1 3/8 "

ØDi-2 3/8 "

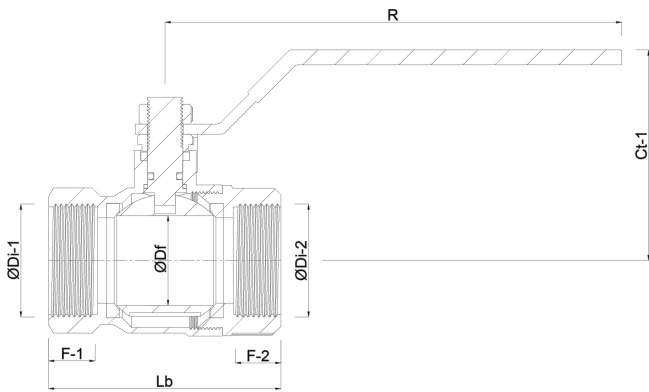

## PRODUCT INFORMATION

Full flow.

**Last modified date: 20/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>