

**Profec Non return valve ductile
iron (GGG40) epoxy coating
DN250 DIN flange 10bar
DN250 blue PN10 (0401936)**



TECHNICAL SPECIFICATIONS

Colour	blue
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Material cover	cast iron GG 40
Material housing	ductile iron (GGG40)
Material seal	NBR
Connection	DIN flange
Gasket	NBR
DIN Standard	DIN 2501
Temperature range	-20°C - 100°C
RAL number	RAL5017
Opening pressure	1 bar
Pressure	10 bar
Ball material	ductile iron/NBR
Size	DN250
Length	600 mm
DN	250

Flange PN10

Outer ø 395 mm

Holes 12

DIMENSIONS


Construction length din 3202 f6

Install. length din 3202 f6

L 600 mm

PCD 350/355 mm

Ct-1 471 mm

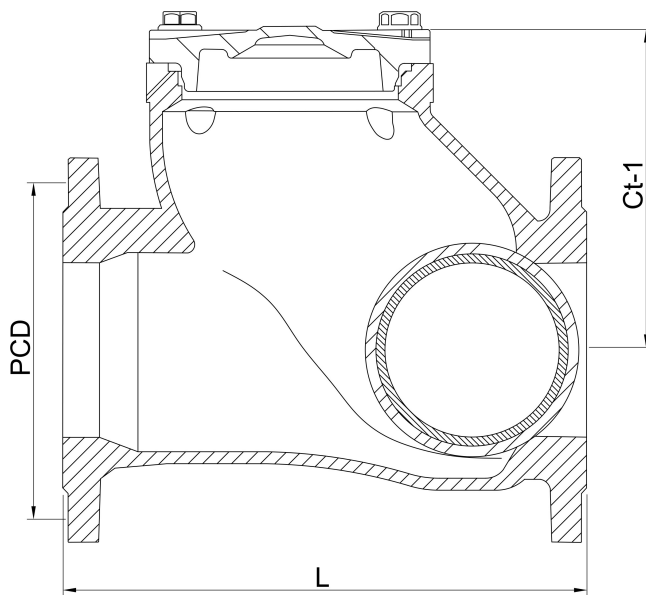

Last modified date: 14/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>