

Hydro-S Ball valve brass nickel plated 1 1/4" female thread 25bar (0470004)




hydro-s

 epco

TECHNICAL SPECIFICATIONS

Material	brass
----------	-------

Surface treatment	nickel plated
-------------------	---------------

Operation	lever
-----------	-------

Colour lever	blue
--------------	------

Handle material	steel
-----------------	-------

Housing construction	2-part
----------------------	--------

Ball material	hard chrome plated brass
---------------	--------------------------

Shaft	brass
-------	-------

Material spindle	brass
------------------	-------

Material housing	brass
------------------	-------

Material seal	PTFE
---------------	------

Connection	female thread
------------	---------------

Max. temperature	180 °C
------------------	--------

Minimum medium temperature (continuous)	-20 °C
--	--------

Temperature range	-20°C - 120°C
-------------------	---------------

Pressure	25 bar
----------	--------

Size	1 1/4"
------	--------

Weight	52 kg
--------	-------

DIMENSIONS

Ct-1	64.2 mm
------	---------

F-1	14.5 mm
-----	---------

F-2	14.5 mm
-----	---------

Handle height	635
---------------	-----


Lb	70 mm
----	-------

R	118 mm
---	--------

ØDf	27 mm
-----	-------

ØDi-1	1 1/4 "
-------	---------

ØDi-2	1 1/4 "
-------	---------

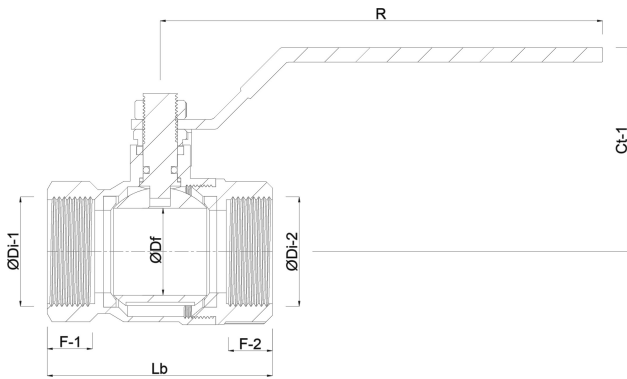

PRODUCT INFORMATION

The Hydro-S Ball valve is a cost efficient ball valve that is available with PTFE stem/ball seals. It is used by professionals for agricultural, heating and industrial projects. This reduced flow ball valve is made from brass which is known to be an environmental friendly solution as the recycling process of brass is less energy-intensive compared to aluminium and steel. It is available in a wide variety of sizes and with a 25 bar working pressure. Hydro-s is the brand of choice for professionals, looking for a cost efficient solution.

Last modified date: 08/09/2026

epco Ltd.
Unit C
Manston Lane
Leeds
LS15 8AH
T +44 (0) 113 2491155
E sales@epco-plastics.com