

# Profec Slangtule messing 1/4" x 6 mm buitendraad x slangtule 30bar (0411806)



# TECHNISCHE SPECIFICATIES

|                  |                         |
|------------------|-------------------------|
| Materiaal        | messing                 |
| Verbinding       | buitendraad x slangtule |
| Werkdruk         | 30 bar                  |
| Max. temp.       | 120 °C                  |
| Maat             | 1/4" x 6 mm             |
| Max. temperatuur | 120 °C                  |
| Sleutelmaat      | 14                      |


# AFMETINGEN

|       |        |
|-------|--------|
| Dq-2  | 4.9 mm |
| F-1   | 7 mm   |
| L     | 33 mm  |
| Lb    | 33 mm  |
| Lq-2  | 14 mm  |
| Nq-2  | 3      |
| P-1   | 14 mm  |
| ØDi-1 | 9 mm   |

|       |      |
|-------|------|
| ØDi-2 | 4 mm |
|-------|------|

|       |       |
|-------|-------|
| ØDo-1 | 1/4 " |
|-------|-------|

|       |      |
|-------|------|
| ØDo-2 | 6 mm |
|-------|------|

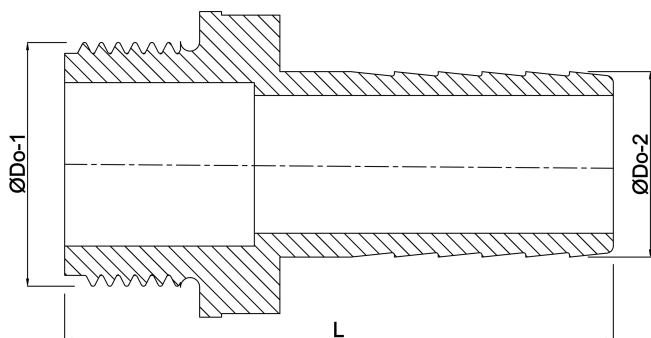

**Gegenereerd op datum: 21-02-2026**

<http://www.bosta.com>