

**PSH Pool pump PP/GF30 1 1/2"  
female thread 1,7A 230VAC  
black type Micro 33 (7032212)**



 P S H

# TECHNICAL SPECIFICATIONS

Colour	black
Shaft	stainless steel 416
Pump body	PP/GF30
Material impeller 1	noryl
Material cover	PP/GF30
Material seal	carbon/ceramic
Connection	female thread
Length	432 mm
Voltage	230VAC
Max. temperature	40 °C
Width	176 mm
Height	218.6 mm
Frequency	50 Hz
IP value	IP55
Motor RPM	2900
Type	Micro 33
Capacity	9,9 m <sup>3</sup> /h

Output Power 0,33 HP



Max. head 11 m

Size 1 1/2"

Weight 7.4 kg

Power 0.25 kW

Ampere 1,7 A

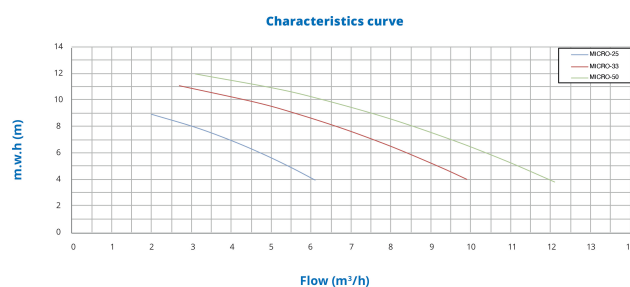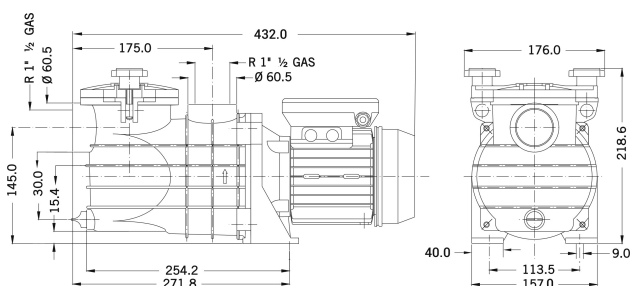

## PRODUCT INFORMATION

Specially designed for small pools, above ground pools and spas.

Features:

- Connection: female thread
- Self-priming
- Suitable for operation with salt chlorinators and sea water up to 3,5% (35gr/l)
- Thermal protection included
- Supplied with 1m cable with Schuko plug
- Insulation Class: F
- Protection: IP55
- Motor: 50Hz/2900rpm with option of 60Hz
- Max water temperature: 40°C

**Last modified date: 12/06/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>