

# DAB Jet pump stainless steel 304 1" female thread 8bar 5,1A 230VAC green self-priming with press control type JETINOX 82 Control D (7030930)



# TECHNICAL SPECIFICATIONS

Colour green

Material stainless steel 304

Pump body stainless steel 304

Material impeller 1 technopolymer A

Model self-priming with press control

Connection female thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C  
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Suction 1 "

Type JETINOX 82 Control D

Size 1"

Power 0.6 kW

MWC 47

Ampere	5,1 A
Max flow rate	3.6 m <sup>3</sup> /h
BEP Capacity	2.4
BEP Head	26.3
PORlh	30.9
PORhh	23.7
PORlq	1.7
PORhq	2.9

## DIMENSIONS

Cb-1	270 mm
Cb-1	144 mm
Cl-1	122 mm
Cr-1	167 mm
Ct-1	239 mm
G-1	111 mm
H	197 mm
H	197 mm
L	406 mm

L 406 mm

LM 390 mm

Mr 207 mm



MW 165 mm

O 9 mm

W-1 174 mm

ØDi-1 1 "

ØDi-2 1 "

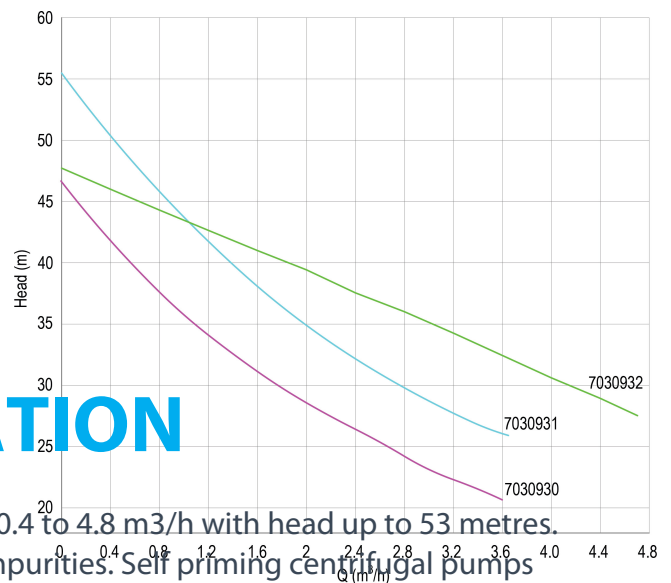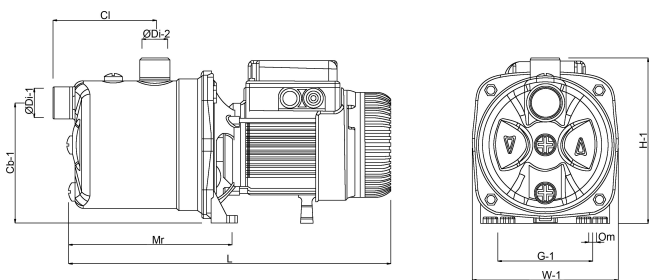

## PRODUCT INFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m<sup>3</sup>/h with head up to 53 metres.

Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

**Last modified date: 24/02/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road

Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>