

Counter current system PP 75 mm glue socket 230VAC type STP-2200 (0180565)




TECHNICAL SPECIFICATIONS

| | |
|---------------------|----------------------|
| Material | PP |
| Shaft | stainless steel |
| Material impeller 1 | PPO |
| Material seal | SiC-SiC |
| Connection | glue socket |
| Type | STP-2200 |
| Output Power | 3 HP |
| Size | 75 mm |
| Voltage | 230VAC |
| Power | 2.2 kW |
| Max flow rate | 55 m ³ /h |
| IP value | IP55 |

DIMENSIONS

| | |
|---|--------|
| A | 370 mm |
| B | 156 mm |
| C | 440 mm |

| | |
|----|---------|
| D | 75 mm |
| E | 395 mm |
| F | 77 mm |
| G | 1110 mm |
| H | 340 mm |
| h1 | 635 mm |

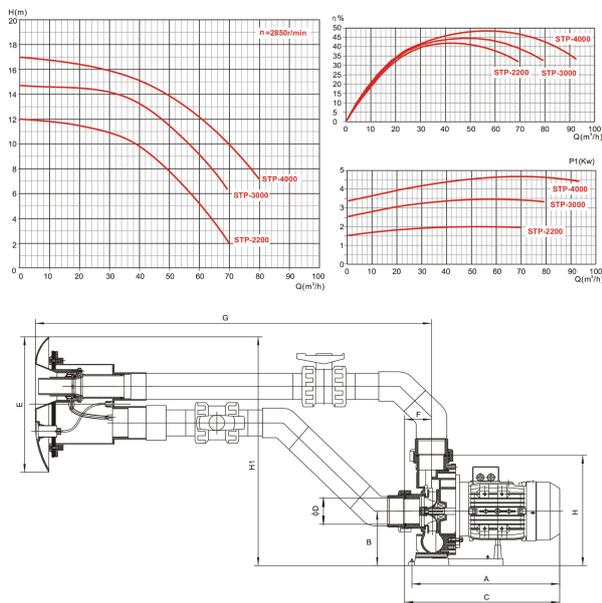

PRODUCT INFORMATION

Adjustable counterflow for swimming training. This jet stream is ready for easy installation. It is possible to regulate the jet strength and air suction on the nozzle which is 40 mm in diameter. The direction of the nozzle is adjustable. The nozzle, suction and pneumatic switch are positioned in the front cover panel of the equipment.

Features:

- Suitable for all type of pools
- Counterflow nozzle 40 mm (regulation water-air)
- Front cover panel with attractive design
- Electropneumatic switch with safety element
- IP 55 protection
- Insulation: Class F
- Motor shaft in stainless steel AISI-304
- Motor housing in aluminium L-2521
- Including 2 x 75mm ball valves

Last modified date: 22/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>